




Fractus Compact Reach Xtend™

Bluetooth[®], 802.11b/g WLAN

Chip Antenna



**Antenna Part Number:
FR05-S1-N-0-102**





TABLE OF CONTENTS

NOTES	2
ANTENNA DESCRIPTION	3
QUICK REFERENCE GUIDE	3
ELECTRICAL PERFORMANCE	4
FRACTUS EVALUATION BOARD	4
CAPABILITIES AND MEASUREMENT SYSTEMS	6
MECHANICAL CHARACTERISTICS	7
DIMENSIONS, TOLERANCES & MATERIALS	7
SPECIFICATIONS FOR INK	8
ASSEMBLY PROCESS	9
ANTENNA FOOTPRINT	11
PACKAGING	12

Fractus is an **ISO 9001:2008** certified company
All our antennas are lead-free and **RoHS** compliant

NOTES

This product is protected by at least the following patents PAT. US 7,148,850, US 7,202,822 and other domestic and international patents pending. Any update on new patents linked to this product will appear in <http://www.fractus.com/index.php/fractus/patents>


All information contained within this document is property of Fractus and is subject to change without prior notice. Information is provided "as is" and without warranties. It is prohibited to copy or reproduce this information without prior approval.



ANTENNA DESCRIPTION

Fractus® Compact Reach Xtend™ chip antenna is engineered specifically for Bluetooth®, WLAN 802.11 b/g and other wireless devices operating at the ISM 2.4 GHz band. Compact Reach Xtend combines small form factor size and high performance to improve the functionality of your wireless devices.

The Compact Reach Xtend is a low-cost antenna solution that combines small form factor and high performance with integration flexibility making it ideal for small consumer electronics devices such as wireless headsets and USB dongles.

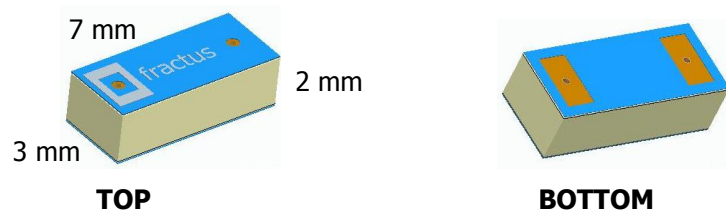

APPLICATIONS

- Wireless Headsets
- WLAN 802.11 b/g USB-dongles
- Bluetooth USB and serial Dongles
- Compact Flash (CF) and Secure Digital (SD) cards
- Cellular handsets
- Digital Cameras

BENEFITS

- Low cost
- High efficiency
- Small form factor

QUICK REFERENCE GUIDE

Technical Features	
Frequency range	2.4 GHz - 2.5 GHz
Average Efficiency	72 %
Radiation Pattern	Omnidirectional
Peak Gain	1.7 dB
VSWR	< 2:1
Polarization	Linear
Weight (aprox)	0.1 g
Temperature	-40°C to + 85°C
Impedance	50Ω
Dimensions (L x W x H)	7 mm x 3 mm x 2 mm

Please contact info@fractus.com if you require additional information on antenna integration or optimisation on your PCB.

FRACTUS S.A.

www.fractus.com

Tel: +34 935442690

Fax: +34 935442691


Table 1 -Technical Features. Measures from the evaluation board (47 mm x 23 mm x 1 mm PCB)



ELECTRICAL PERFORMANCE

FRACTUS EVALUATION BOARD

The Fractus configuration used in testing the Compact Reach Xtend chip antenna is displayed in Figure 1.

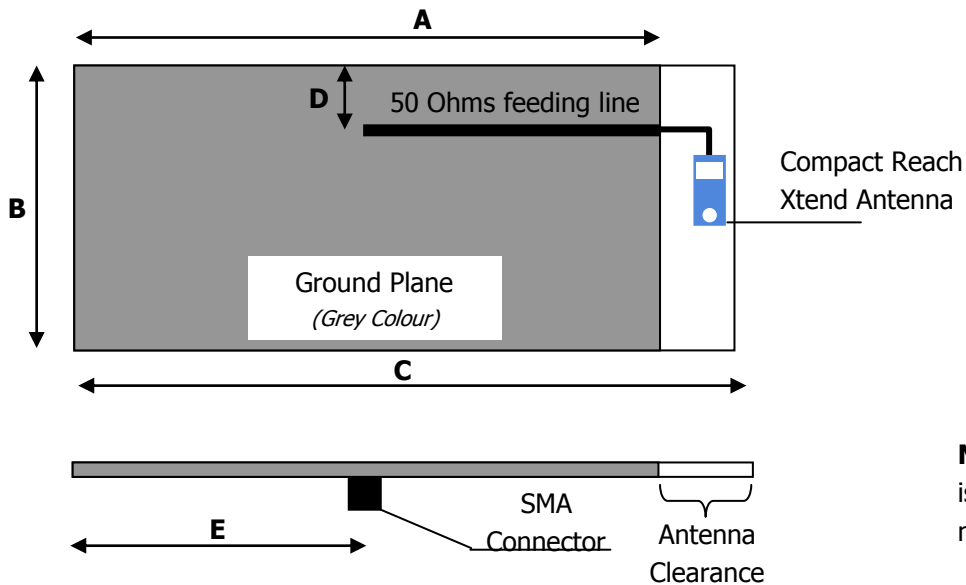

Measure	mm
A	41.0
B	23.0
C	47.0
D	8.0
E	26.0

Tolerance: ± 0.2 mm


Material: the evaluation board is built on FR4 substrate of 1.0 mm of thickness.

Note: refer to the Antenna Footprint section on page 10 of this User Manual for additional information about the clearance area and antenna footprint.

Figure 1 – Compact Reach Xtend Evaluation Board


VSWR and Efficiency

VSWR (Voltage Standing Wave Ratio) and Efficiency versus Frequency (GHz)

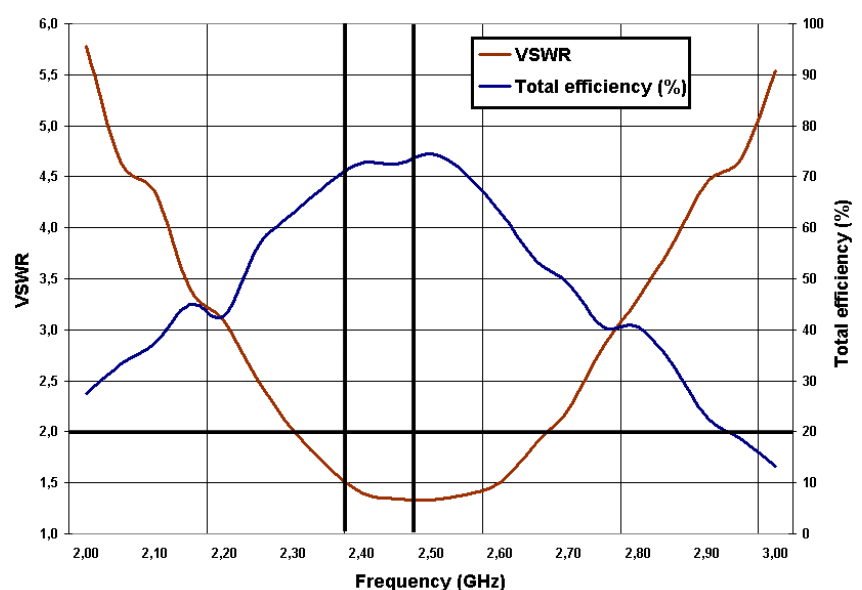



Radiation Pattern, Gain and Efficiency

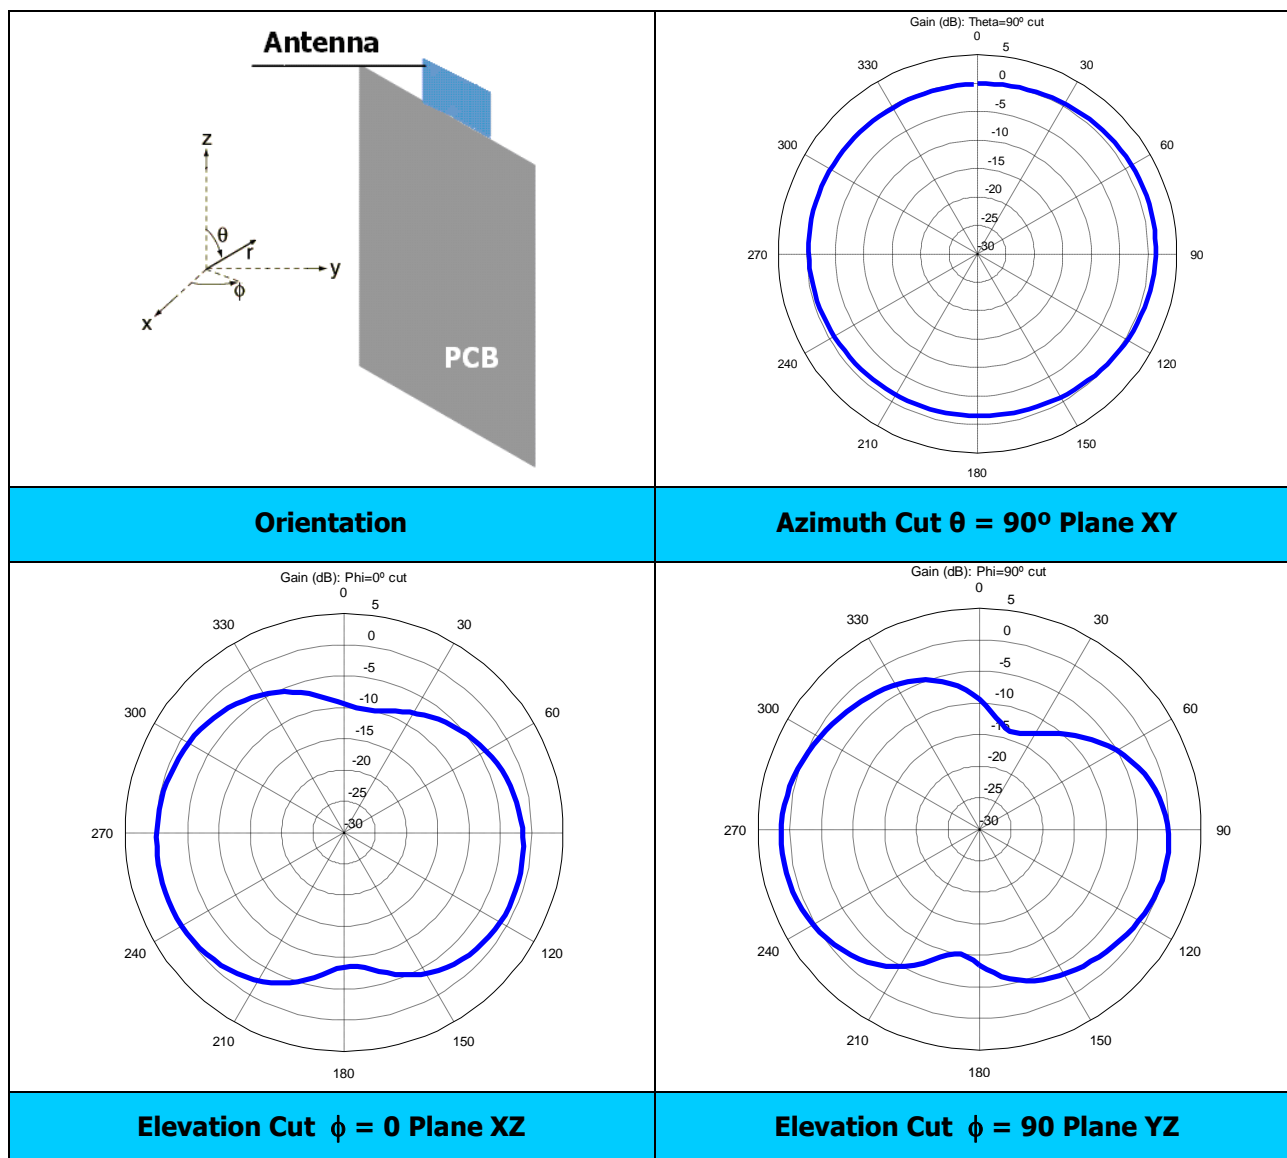

Radiation patterns at 2.45 GHz

Gain	Peak Gain	1.7 dB
	Average Gain across the band	1.32 dB
	Gain Range across the band (min, max)	0.71 dB , 1.7 dB
Efficiency	Peak Efficiency	75 %
	Average Efficiency across the band	72 %
	Efficiency Range across the band	69 % - 75 %

Table 2 – Antenna Gain and Efficiency within the 2.4-2.5 GHz band. Measures made in the evaluation board and in the Satimo STARGATE 32.





CAPABILITIES AND MEASUREMENT SYSTEMS

Fractus specialises in designing and manufacturing optimised antennas for wireless applications and providing our clients with RF expertise. We offer turn-key antenna products and antenna integration support to minimise your time requirement and maximize your return on investment during your product development efforts. We also provide our clients with the opportunity to leverage our in-house testing and measurement facilities to obtain accurate results quickly and efficiently.





Agilent E5071B

VSWR
&
S Parameters



SATIMO's STARGATE 32

Radiation
Pattern
&
Efficiency



Anechoic and semi-anechoic chambers and full equipped in-house lab



MECHANICAL CHARACTERISTICS

DIMENSIONS, TOLERANCES & MATERIALS

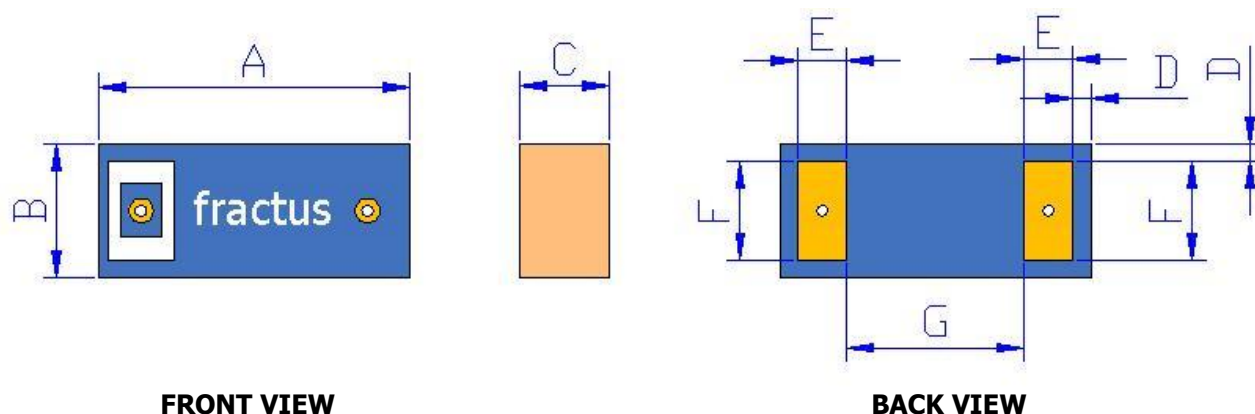


Figure 2 – Antenna Dimensions and Tolerances

Measure	mm	Measure	mm
A	7.00 ± 0.20	E	1.10 ± 0.10
B	3.00 ± 0.20	F	2.20 ± 0.10
C	2.00 ± 0.20	G	4.00 ± 0.20
D	0.40 ± 0.15		

The white rectangle located on the front side of the antenna provides you with a visual cue to mount the antenna. It is located physically above the feed point of the antenna and has been included to decrease possible manufacturing error.


Fractus Compact Reach Xtend chip antenna is compliant with the directive **2002/95/EC** on the restriction of the use of hazardous substances (**RoHS**). Should you require a green certificate (RoHS report), please contact your sales representative at info@fractus.com.



SPECIFICATIONS FOR INK

Blue (pantone 312)	<ul style="list-style-type: none">• 50% Blue CARAPACE EMP 110-3245• 50% White ink CARAPACE
White	<ul style="list-style-type: none">• White ink CARAPACE
Black (solder mask)	<ul style="list-style-type: none">• Black Taiyo PSR4000

Next figure shows the correct colours of the antenna:

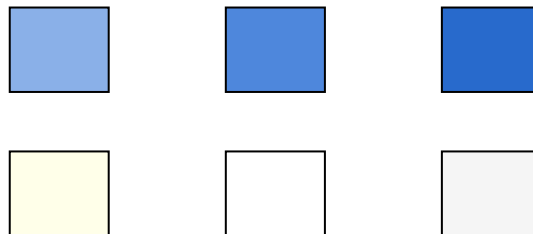

Acceptable colour range



ASSEMBLY PROCESS

Figure 3 shows the back and front view of the Compact Reach Xtend chip antenna, which indicates the location of the feeding point and the mounting pad:

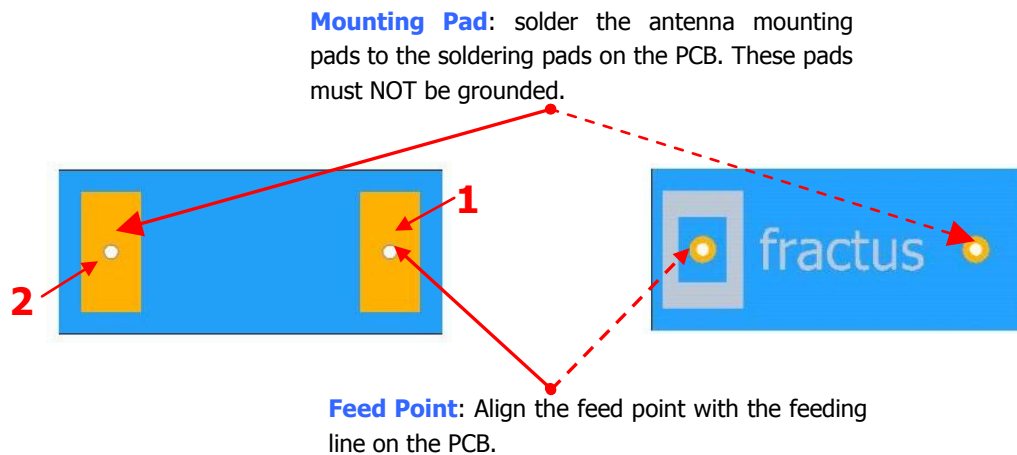


Figure 3 –Views of the Compact Reach Xtend Chip Antenna.

As a surface mount device (SMD), this antenna is compatible with industry standard soldering processes. The basic assembly procedure for this antenna is as follows:

1. Apply a solder paste on the pads of the PCB. Place the antenna on the board.
2. Perform a reflow process according to the temperature profile detailed in table 3, figure 5 of page 9.
3. After soldering the antenna to the circuit board, perform a cleaning process to remove any residual flux. Fractus recommends conducting a visual inspection after the cleaning process to verify that all reflux has been removed.

The drawing below shows the soldering details obtained after a correct assembly process:

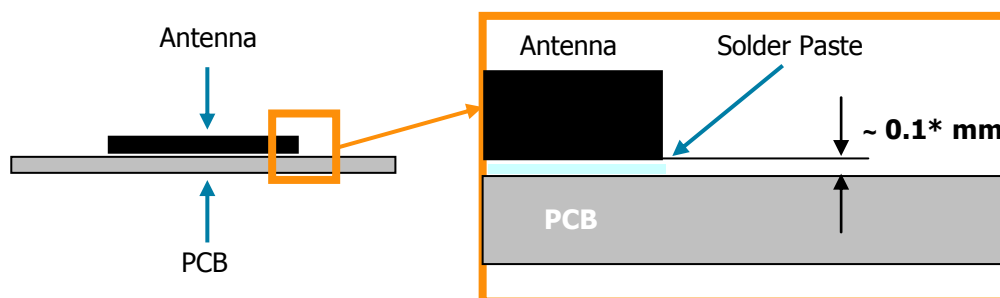


Figure 4 - Soldering Details

NOTE(*): Solder paste thickness after the assembly process will depend on the thickness of the soldering stencil mask. A stencil thickness equal or larger than **127 microns (5 mils)** is required.



Fractus Compact Reach Xtend chip antenna can be assembled following either Sn-Pb or Pb-free assembly processes. According to the Standard **IPC/JEDEC J-STD-020C**, the temperature profile suggested is as follows:

Phase	Profile features	Sn-Pb Assembly	Pb-Free Assembly (SnAgCu)
RAMP-UP	Avg. Ramp-up Rate (T_{smax} to T_p)	3 °C / second (max.)	3 °C / second (max.)
PREHEAT	<ul style="list-style-type: none">- Temperature Min (T_{smin})- Temperature Max (T_{smax})- Time (t_{smin} to t_{smax})	100 °C 150 °C 60-120 seconds	150°C 200°C 60-180 seconds
REFLOW	<ul style="list-style-type: none">- Temperature (T_L)- Total Time above T_L (t_L)	183 °C 60-150 seconds	217 °C 60-150 seconds
PEAK	<ul style="list-style-type: none">- Temperature (T_p)- Time (t_p)	235 °C 10-30 seconds	260 °C 20-40 second
RAMP-DOWN	Rate	6 °C / second max.	6 °C/second max.
Time from 25 °C to Peak Temperature		6 minutes max.	8 minutes max.

Table 3 – Recommended soldering temperatures

Next graphic shows temperature profile (grey zone) for the antenna assembly process in reflow ovens.


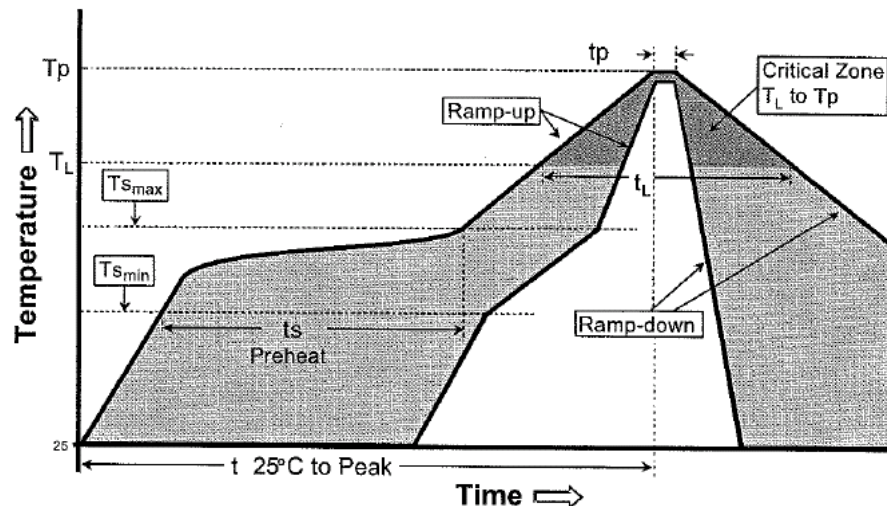


Figure 5 – Temperature profile



ANTENNA FOOTPRINT

This antenna footprint applies for the reference evaluation board described in page 4 of this User Manual. Feeding line dimensions over the clearance zone described in figure 6 applies for a 1 mm thickness FR4 PCB.

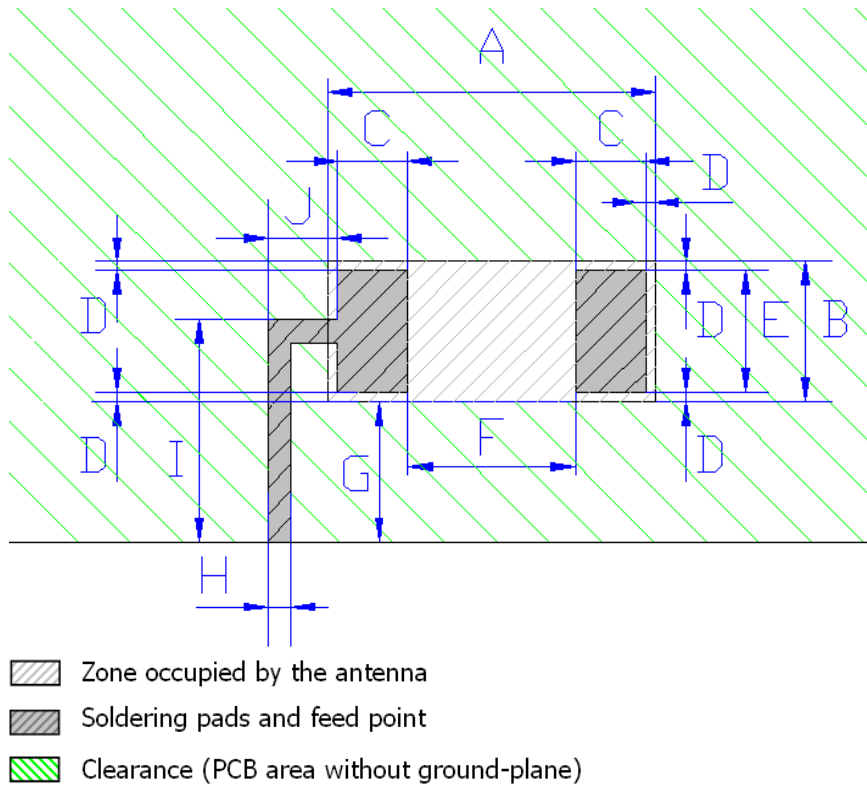

Measure	mm
A	7.00
B	3.00
C	1.50
D	0.20
E	2.60
F	3.60
G	3.00
H	0.50
I	4.75
J	1.50

Tolerance: ± 0.2 mm

Figure 6 – Antenna Footprint Details

Other PCB form factors and configurations may require a different feeding configuration, feeding line dimensions and clearance areas. If you require support for the integration of the antenna in your industrial design, we would be pleased to assist you with this design process.

Please, contact your sales representative at info@fractus.com to get additional information on recommended configurations for different devices:

FRACTUS S.A.

www.fractus.com

Tel: +34 935442690

Fax: +34 935442691



PACKAGING

The Compact Reach Xtend chip antenna is available in tape and reel packaging.



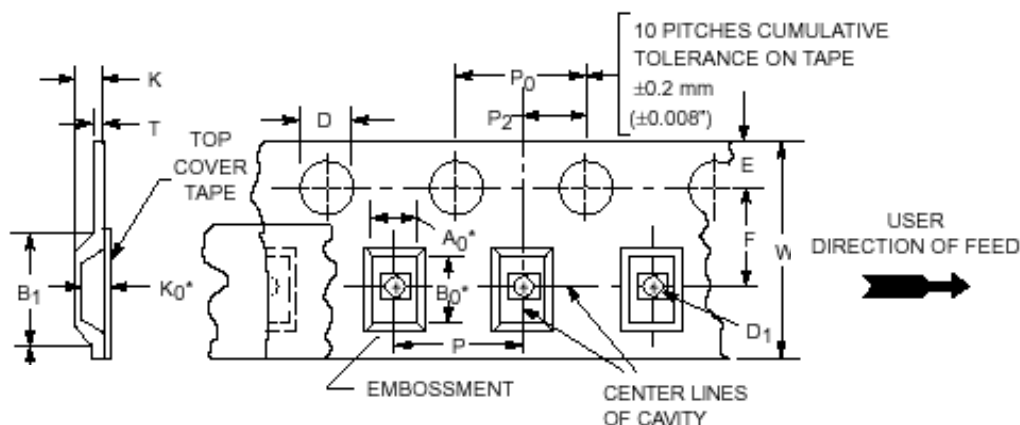


Figure 7 – Tape Dimensions

Measure	mm	Measure	mm
TAPE WIDTH	16	Wmax	16.3
A0	3.8	E	1.7
B0	7.8	F	7.5
K0	2.3	K	2.6 max
B1	8.2 max	P	8.0
D	1.5	P0	4.0
D1	1.5 min	P2	2.0

Tolerance in all above measures: ± 0.2 mm

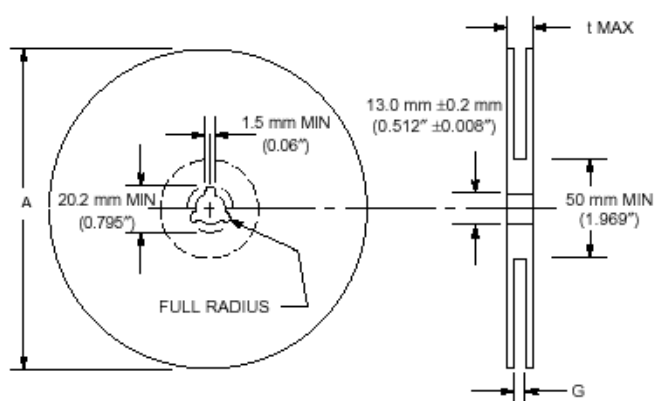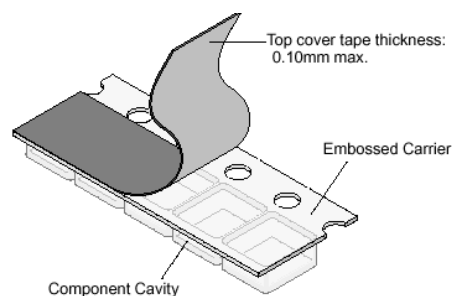

Measure	mm
A max	330
G	16.4
t max	22.4

Tolerance: ± 0.2 mm

Reel Capacity: 2500 antennas.

Figure 8 – Reel Dimensions and Capacity