



SensComp, Inc.
36704 Commerce Rd.
Livonia, MI 48150
Telephone: (734) 953-4783
Fax: (734) 953-4518
www.senscomp.com

Adjustable Ranging Transformer

SensComp Electronic Component – Ranging Transformer, Adjustable Core

Features

Adjustable Core for Precise Frequency Matching


Part No.

PID# 614096 – Ranging Transformer

Specifications

Primary Supply Voltage 5.0 ± 0.1 VDC
Primary DC Resistance (ohm) $0.47 \pm 15\%$
Primary Winding Outermost
Secondary Inductance (at 55 kHz) 21 ± 2 mH
Secondary DC Resistance (ohm) 150 - 200
Output Voltage Amplitude 350 – 450 V_{PP}
Duty Cycle < 2%
Dimensions: dimensions in parentheses are in mm

Specifications

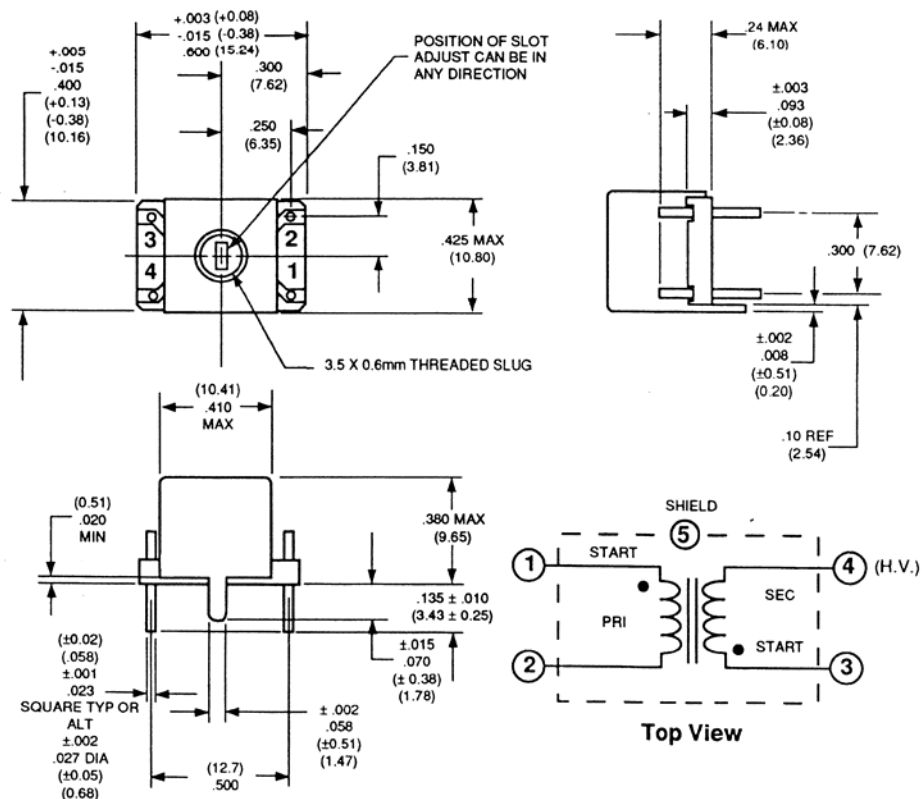

For more information, visit our website: www.senscomp.com

Copyright © 2004 SensComp, Inc. 9/14/04