

4)

$$V_{isb}(t) = \overset{\textcircled{1}}{V_{m1}(t) - V_c(t)} - V_m(t)_{90^\circ} V_c(t)_{90^\circ} \\ + \overset{\textcircled{2}}{V_{m2}(t) - V_c(t)} + V_m(t)_{90^\circ} V_c(t)_{90^\circ}$$

① we already have this part (the upper side band)

② Now we need the lower side band of the signal.

* adding them together will give us $V_{isb}(t)$.

~~8/2/22~~

5) QAM.

"Phase shift ~~each~~ carrier by 90° and multiplying by 1 signal."

- + $V_{m2}(t) \cdot V_c(t)$
- ① we already have this part (the upper side band)
 - ② Now we need the lower side band of the signal.
- * adding them together will give us $V_{sb}(t)$.


~~Sketch~~

5) QAM.

"Phase shift carrier by 90° and multiply by 1 signal."

$$* V_{QAM} = V_c \cos(2\pi f_c t) \cdot V_{m1}(t) + V_c \sin(2\pi f_c t) \cdot V_{m2}(t)$$

6) ① DSB SC - Bandwidth = $2f_m = 2060 \text{ Hz}$

② ~~Sketch~~  = f_m

② $V_{sb} = \text{BW} - f_c = f_m + B_r = 1030 + ?$

③ ~~SSB SC~~ = $-f_c = f_m = 1030 \text{ Hz}$

④ ~~ISB~~ = $-f_c = 2f_m = 2060 \text{ Hz}$

2)

~~2/3~~

$$V_{sb}(t) = \cos(2 \times 10^3 \pi t) + \frac{1}{10} \cos(1960 \pi t + \frac{\pi}{2}) \\ + \frac{9}{10} \cos(2040 \pi t - \frac{\pi}{2}) \\ + \frac{3}{2} \cos(2060 \pi t)$$

3) $V_{ssb}(t)$ is upper side band:

$$V_{ssb}(t) = V_m(t) \cdot V_c(t) - V_m(t)_{90^\circ} V_c(t)_{90^\circ}$$

$$V_{ssb}(t) = \left[3 \cos(20 \pi t + \frac{\pi}{4}) + 2 \sin(60 \pi t) \right. \\ \left. - \cos(100 \pi t) \right] \cos(2 \pi \times 10^3 t)$$

$$- \left[3 \sin(20 \pi t + \frac{\pi}{4}) + 2 \cos(60 \pi t) \right. \\ \left. - \sin(100 \pi t) \right] \sin(2 \pi \times 10^3 t)$$

$$+ \frac{1}{10} \cos(2040\pi t - \frac{\pi}{2})$$

$$+ \frac{3}{2} \cos(2060\pi t)$$

3) $V_{ssb}(t)$ is upper side band:

$$V_{ssb}(t) = V_m(t) \cdot V_c(t) - V_m(t)_{90^\circ} \cdot V_c(t)_{90^\circ}$$

$$V_{ssb}(t) = \left[3 \cos(20\pi t + \frac{\pi}{4}) + 2 \sin(60\pi t) - \cos(100\pi t) \right] \cos(2\pi \times 10^3 t)$$

$$- \left[3 \sin(20\pi t + \frac{\pi}{4}) + 2 \cos(60\pi t) - \sin(100\pi t) \right] \sin(2\pi \times 10^3 t)$$

$$V_{ssb}(t) = 3 \cos(20\pi t + \frac{\pi}{4}) \cos(2\pi \times 10^3 t) + 2 \sin(60\pi t) \cos(2\pi \times 10^3 t)$$

$$- \cos(100\pi t) \cos(2\pi \times 10^3 t)$$

$$- 3 \sin(20\pi t + \frac{\pi}{4}) \sin(2\pi \times 10^3 t)$$


$$+ 2 \cos(60\pi t) \sin(2\pi \times 10^3 t)$$

$$- \sin(100\pi t) \sin(2\pi \times 10^3 t)$$

3) continued...

$$\begin{aligned} \frac{3}{2} \\ V_{ssh}(t) = & \frac{3}{2} \cos(1980\pi t - \frac{\pi}{4}) + \frac{3}{2} \cos(2020\pi t + \frac{\pi}{4}) \\ & + \cos(1940\pi t + \frac{\pi}{2}) + \cos(2060\pi t - \frac{\pi}{2}) + \\ & - \frac{1}{2} \cos(1900\pi t) - \frac{1}{2} \cos(2100\pi t) \\ & - \frac{3}{2} \cos(1980\pi t) + \frac{3}{2} \cos(2020\pi t) \\ & + \cos(1940\pi t + \frac{\pi}{2}) + \cos(2060\pi t - \frac{\pi}{2}) \\ & + - \frac{1}{2} \cos(1900\pi t) + \frac{1}{2} \cos(2100\pi t) \end{aligned}$$

$$\begin{aligned} V_{ssh}(t) = & \frac{3}{2} \cos(1980\pi - \frac{\pi}{4}) + 3 \cos(2020\pi t + \frac{\pi}{4}) \\ & + 2 \cos(1940\pi t + \frac{\pi}{2}) + 2 \cos(2060\pi t - \frac{\pi}{2}) \\ & - \cos(1900\pi t) - \frac{3}{2} \cos(1980\pi) \end{aligned}$$

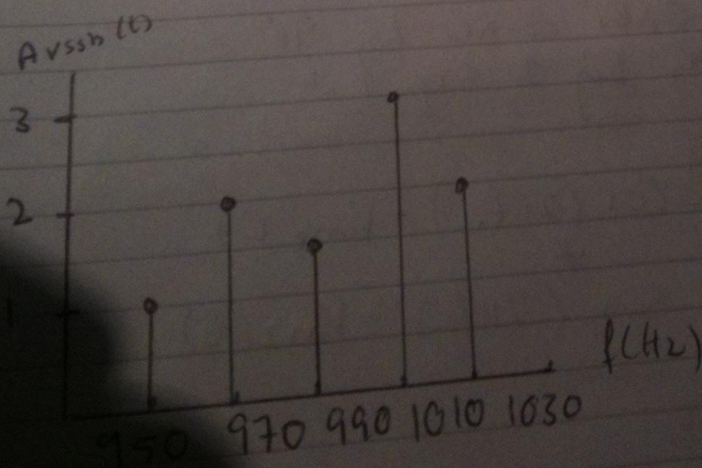

$$\begin{aligned}
 & - \frac{3}{2} \cos(1980\pi t) + \frac{3}{2} \cos(2020\pi t) \\
 & + \cos(1940\pi t + \frac{\pi}{2}) + \cos(2060\pi t - \frac{\pi}{2}) \\
 & * - \frac{1}{2} \cos(1960\pi t) + \frac{1}{2} \cos(2100\pi t)
 \end{aligned}$$

$$\begin{aligned}
 V_{ssh}(t) = & \frac{3}{2} \cos(1980\pi t - \frac{\pi}{4}) + 3 \cos(2020\pi t + \frac{\pi}{4}) \\
 & + 2 \cos(1940\pi t + \frac{\pi}{2}) + 2 \cos(2060\pi t - \frac{\pi}{2}) \\
 & - \cos(1960\pi t) - \frac{3}{2} \cos(1980\pi t)
 \end{aligned}$$

