

✓ 54S/74S189 011745

✓ 54LS/74LS189 011750

64-BIT RANDOM ACCESS MEMORY

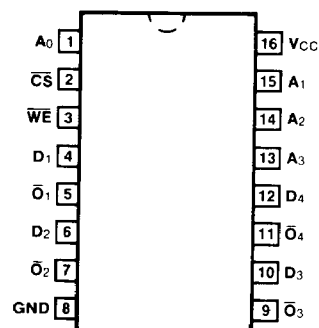
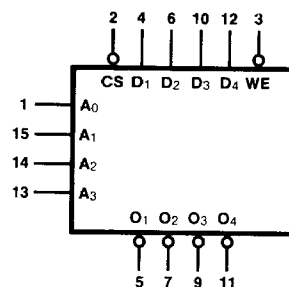
(With 3-State Outputs)

DESCRIPTION — The '189 is a high speed 64-bit RAM organized as a 16-word by 4-bit array. Address inputs are buffered to minimize loading and are fully decoded on-chip. The outputs are 3-state and are in the high impedance state whenever the Chip Select (\overline{CS}) input is HIGH. The outputs are active only in the Read mode and the output data is the complement of the stored data.

- 3-STATE OUTPUTS FOR DATA BUS APPLICATIONS
- BUFFERED INPUTS MINIMIZE LOADING
- ADDRESS DECODING ON-CHIP
- DIODE CLAMPED INPUTS MINIMIZE RINGING

ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE	MILITARY GRADE	PKG TYPE
		$V_{CC} = +5.0\text{ V} \pm 5\%$, $T_A = 0^\circ\text{C to } +70^\circ\text{C}$	$V_{CC} = +5.0\text{ V} \pm 10\%$, $T_A = -55^\circ\text{C to } +125^\circ\text{C}$	
Plastic DIP (P)	A	74S189PC, 74LS189PC		9B
Ceramic DIP (D)	A	74S189DC, 74LS189DC	54S189DM, 54LS189DM	6B
Flatpak (F)	A	74S189FC, 74LS189FC	54S189FM, 54LS189FM	4L

CONNECTION DIAGRAM
PINOUT A**LOGIC SYMBOL**

V_{CC} = Pin 16
GND = Pin 8

INPUT LOADING/FAN-OUT: See Section 3 for U.L. definitions

PIN NAMES	DESCRIPTION	54/74S (U.L.) HIGH/LOW	54/74LS (U.L.) HIGH/LOW
$A_0 - A_3$	Address Inputs	0.63/0.16	0.5/0.013
\overline{CS}	Chip Select Input (Active LOW)	0.63/0.16	0.5/0.013
\overline{WE}	Write Enable Input (Active LOW)	0.63/0.16	0.5/0.013
$D_1 - D_4$	Data Inputs	0.63/0.16	0.5/0.013
$\overline{O}_1 - \overline{O}_4$	Inverted Data Outputs	162/10 (50)	10/10 (5.0)

FUNCTION TABLE

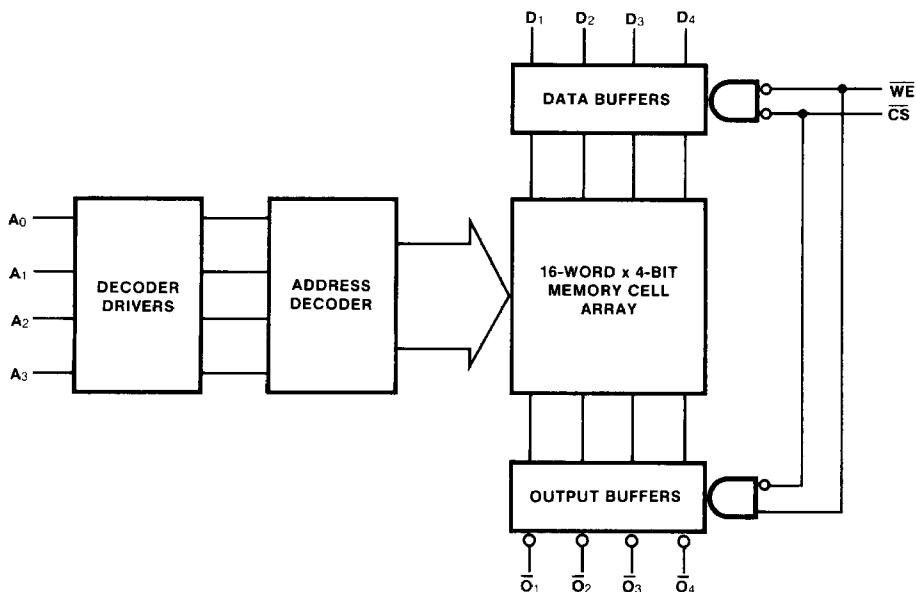
INPUTS		OPERATION	CONDITION OF OUTPUTS
\overline{CS}	\overline{WE}		
L	L	Write	High Impedance
L	H	Read	Complement of Stored Data
H	X	Inhibit	High Impedance

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

LOGIC DIAGRAM



DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

SYMBOL	PARAMETER		54/74S		54/74LS		UNITS	CONDITIONS
			Min	Max	Min	Max		
VOL	Output LOW Voltage	XM	0.5		0.4		V	$V_{CC} = \text{Min}$ $I_{OL} = 16 \text{ mA ('S189)}$ $I_{OL} = 8.0 \text{ mA (54LS189)}$ $I_{OL} = 16 \text{ mA (74LS189)}$
		XC	0.45		0.5			
VOH	Output HIGH Voltage	XM	2.4		2.8		V	$V_{CC} = \text{Min}$ $I_{OH} = 2.0 \text{ mA (54S189)}$ $I_{OH} = 6.5 \text{ mA (74S189)}$ $I_{OH} = 0.4 \text{ mA ('LS189)}$
		XC	2.4		2.8			
Ios	Output Short Circuit Current		-30	-100	-80*		mA	$V_{CC} = \text{Max}$
Icc	Power Supply Current			110		40	mA	$V_{CC} = \text{Max}; \overline{WE}, \overline{CS}, \text{Gnd}$

*Typical Value

AC CHARACTERISTICS OVER RECOMMENDED V_{CC} AND T_A RANGE (unless otherwise specified)

SYMBOL	PARAMETER		54/74S		54/74LS		UNITS	CONDITIONS
			C _L = 30 pF R _L = 300 Ω		C _L = 15 pF			
			Min	Max	Min	Max		
t _{PLH} t _{PHL}	Access Time, HIGH or LOW, A _n to \overline{O}_n	X _M	50	37*	ns	Figs. 3-1, 3-20		
		X _C	35	37*				
t _{PZH} t _{PZL}	Access Time, HIGH or LOW, \overline{CS} to \overline{O}_n	X _M	32	10*	ns	Figs. 3-3, 3-11, 3-12 R _L = 2 kΩ ('LS189)		
		X _C	22	10*				
t _{PHZ}	Disable Time \overline{CS} to \overline{O}_n	X _M	25		ns	Figs. 3-3, 3-11, 3-12 R _L = 2 kΩ ('LS189) C _L = 5 pF		
		X _C	25					
t _{PLZ}	Disable Time \overline{CS} to \overline{O}_n	X _M	25					
		X _C	17					
t _{PZH} t _{PZL}	Access Time, HIGH or LOW, \overline{WE} to \overline{O}_n	X _M	40		ns	Figs. 3-3, 3-11, 3-12 R _L = 2 kΩ ('LS189)		
		X _C	30					
t _{PHZ}	Disable Time \overline{WE} to \overline{O}_n	X _M	30		ns	Figs. 3-3, 3-11, 3-12 R _L = 2 kΩ ('LS189) C _L = 5 pF		
		X _C	20					
t _{PLZ}	Disable Time \overline{WE} to \overline{O}_n	X _M	32					
		X _C	20					

AC OPERATING REQUIREMENTS OVER RECOMMENDED V_{CC} AND T_A RANGE (unless otherwise specified)

SYMBOL	PARAMETER	54/74S		54/74LS		UNITS	CONDITIONS
		Min	Max	Min	Max		
t_s (H) t_s (L)	Setup Time HIGH or LOW A_n to \overline{WE}	0 0		10* 10*		ns	Fig. 3-21
t_h (H) t_h (L)	Hold Time HIGH or LOW A_n to \overline{WE}	0 0		0* 0*		ns	
t_s (H) t_s (L)	Setup Time HIGH or LOW D_n to \overline{WE}	20 20		25* 25*		ns	Fig. 3-13
t_h (H) t_h (L)	Hold Time HIGH or LOW D_n to \overline{WE}	0 0		0* 0*		ns	
t_s (L)	Setup Time LOW \overline{CS} to \overline{WE}	0				ns	Fig. 3-14
t_h (L)	Hold Time LOW \overline{CS} to \overline{WE}	0				ns	Fig. 3-13
t_w (L)	\overline{WE} Pulse Width LOW	20		25*		ns	Fig. 3-14

*Typical Value

