


Use JDM Programmer setting/Will autodetect in
 WinPic800 V3.59 and PICPgm V1.0.1.2
 Switch On for 16F628A, Off for 16F84A
 MUST use straight through 9pin cable, NOT NULL-Modem cable.

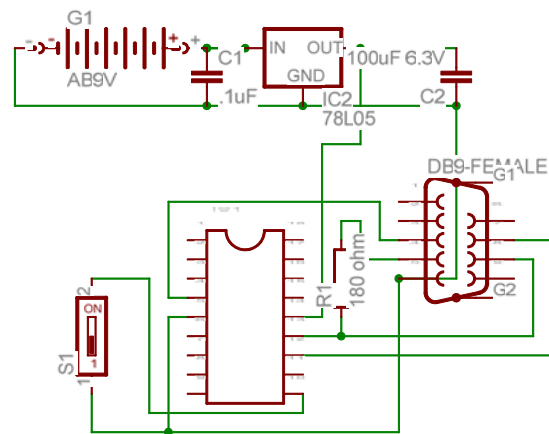

Serial Programmer for 16F84A and 16F628A
 Design Copyright 2007 Daniel A. Wright