

NEMA17 Bipolar Stepper Motor

Rev: A

Date: 2011/02/21


COMMON RATINGS

Step angle :	1.8°	Dielectric strength :	500VAC
Positional accuracy :	±5%	Insulation resistance :	100Mohm(500VDC)
Number of Phase :	2	Operating temperature :	-10℃~50℃
Temperature rise :	80℃MAX	Insulation class :	B
Rotor inertia :	82 gcm ²	Weight :	0.40 Kg


SPECIFICATIONS

Holding torque (2 phases on) N.m	Rated Current/Phase (Amps DC)	Phase Resistance (ohms) ±10%	Voltage Current/Phase (V DC)	Phase Inductance (mH)±20%(1KHz) Typical
0.59	2.0	1.4	2.8	3.0

DIMENSIONS unit=mm

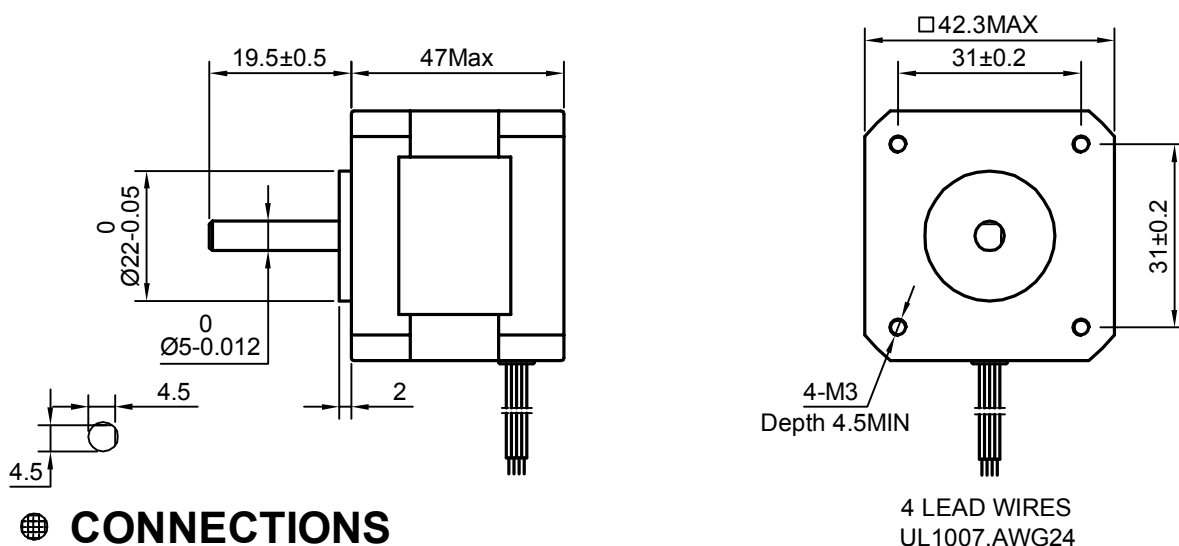

CONNECTIONS

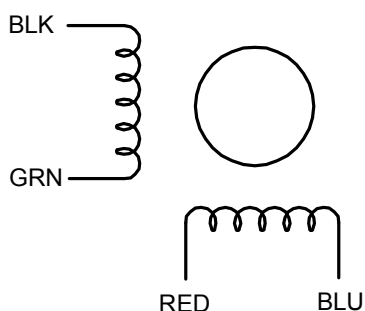

Note:

1. Lead Wires should be stripped & tinned.
2. All the parts are CE and Rosh Certified.

						ALTN1728S87			技术规格书	
									OSM TECHNOLOGY	
标记	处数	分区	更改文件号	签名	日期	阶段标记	重量	比例		
设计			标准化							
审核										
工艺			批准			共 张		第 张		