

Request For Quotation

Order the parts you need from our real-time inventory database. Simply complete a request for quotation form with your part information and a sales representative will respond to you with price and availability.

[Request For Quotation](#)

Your free datasheet starts on the next page.

More datasheets and data books are available from our homepage: <http://www.datasheetarchive.com>

PC317 Series

Opaque*, Mini-Flat Package, General Purpose Photocoupler

■ Features

1. Opaque type, mini-flat package
PC317 (1-channel) PC3D17 (2-channel)
PC3Q17 (4-channel)
2. Subminiature type
(The volume is smaller than that of our conventional DIP type by as far as 30%.)
3. Current transfer ratio
CTR: MIN. 50% at $I_F = 5\text{mA}$, $V_{CE} = 5\text{V}$
4. Isolation voltage between input and output
 V_{ISO} : 2,500Vrms

* Empolys double transfer mold technology.

■ Applications

1. Hybrid substrates that require high density mounting
2. Programmable controllers

■ Outline Dimensions

(Unit : mm)

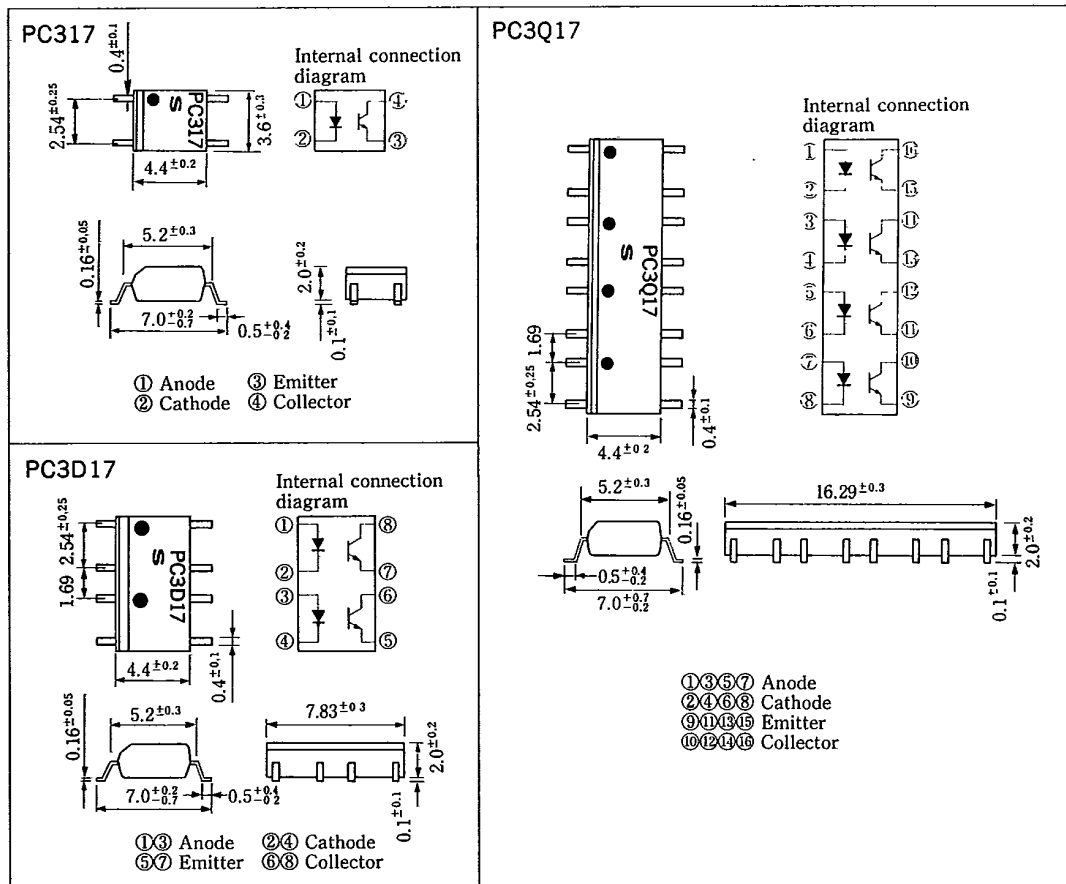


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

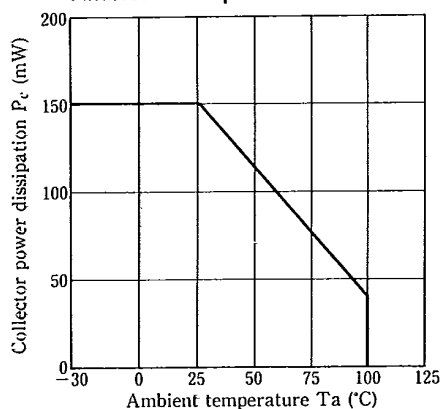


Fig. 3 Peak Forward Current vs. Duty Ratio

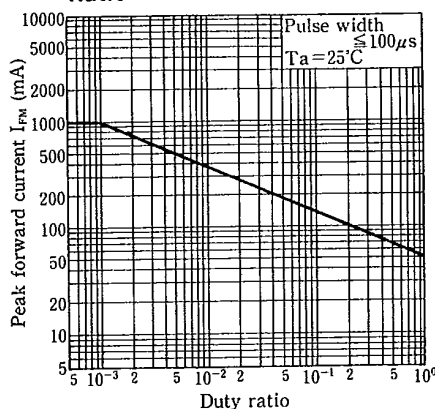


Fig. 4 Forward Current vs. Forward Voltage

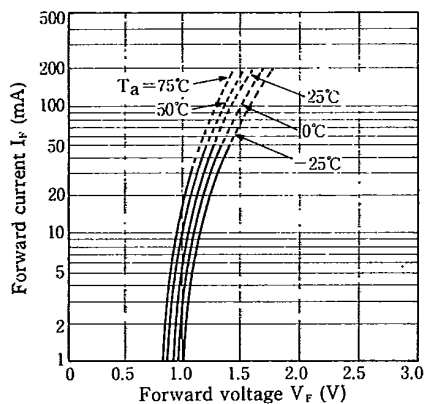


Fig. 5 Current Transfer Ratio vs. Forward Current

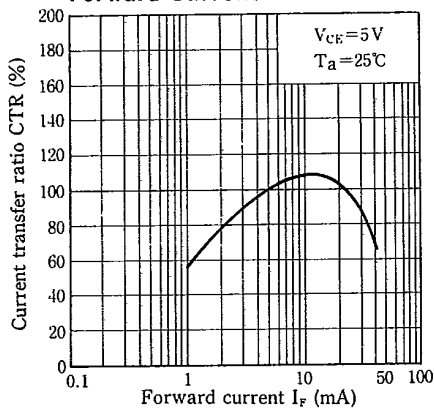


Fig. 6 Collector Current vs. Collector-emitter Voltage

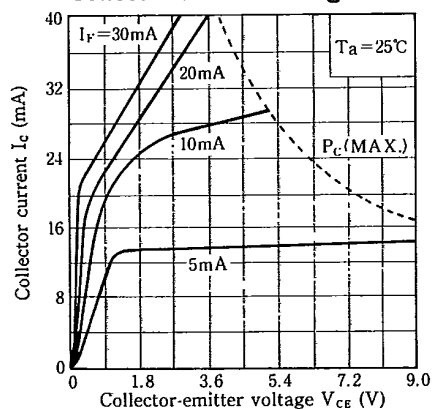


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

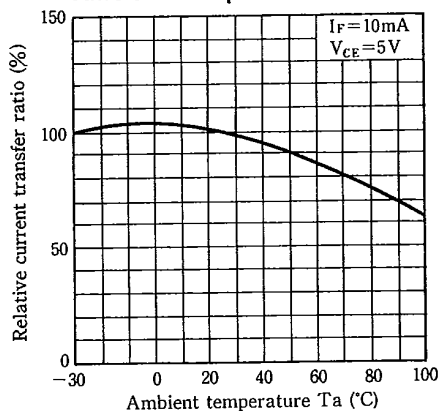
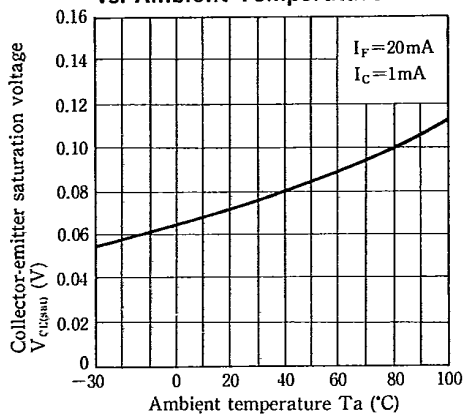
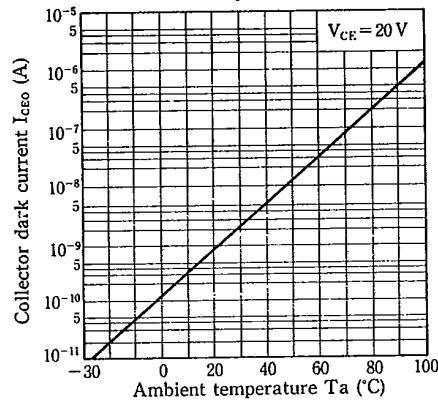
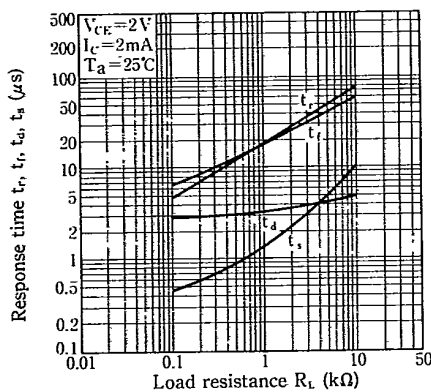
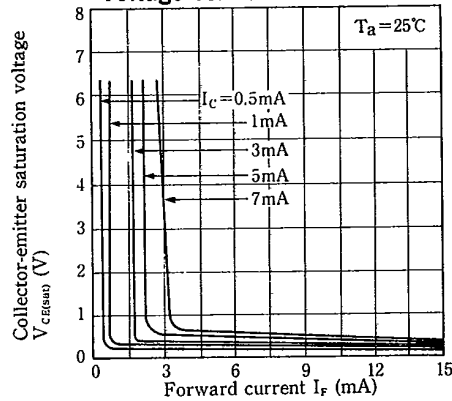
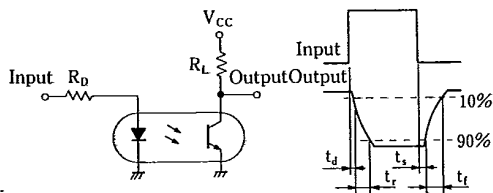


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**Fig. 9 Collector Dark Current vs. Ambient Temperature****Fig. 10 Response Time vs. Load Resistance****Fig. 11 Collector-emitter Saturation Voltage vs. Forward Current****Test Circuit for Response Time****Package Specification of PC300 Series (1-ch type)**

Model No.	Sales Unit	Package Specifications	Diameter of Reel	Tape Width
PC3 * * Z	1 pc.	Sleeve package (Net: 125 pcs.)	—	—
PC3 * *	3,000 pcs.	Taping package (Net: 3,000 pcs.)	φ370mm	12mm
PC3 * T	750 pcs.	Taping package (Net: 750 pcs.)	φ178mm	12mm