


NI-CD/NI-MH CHARGER

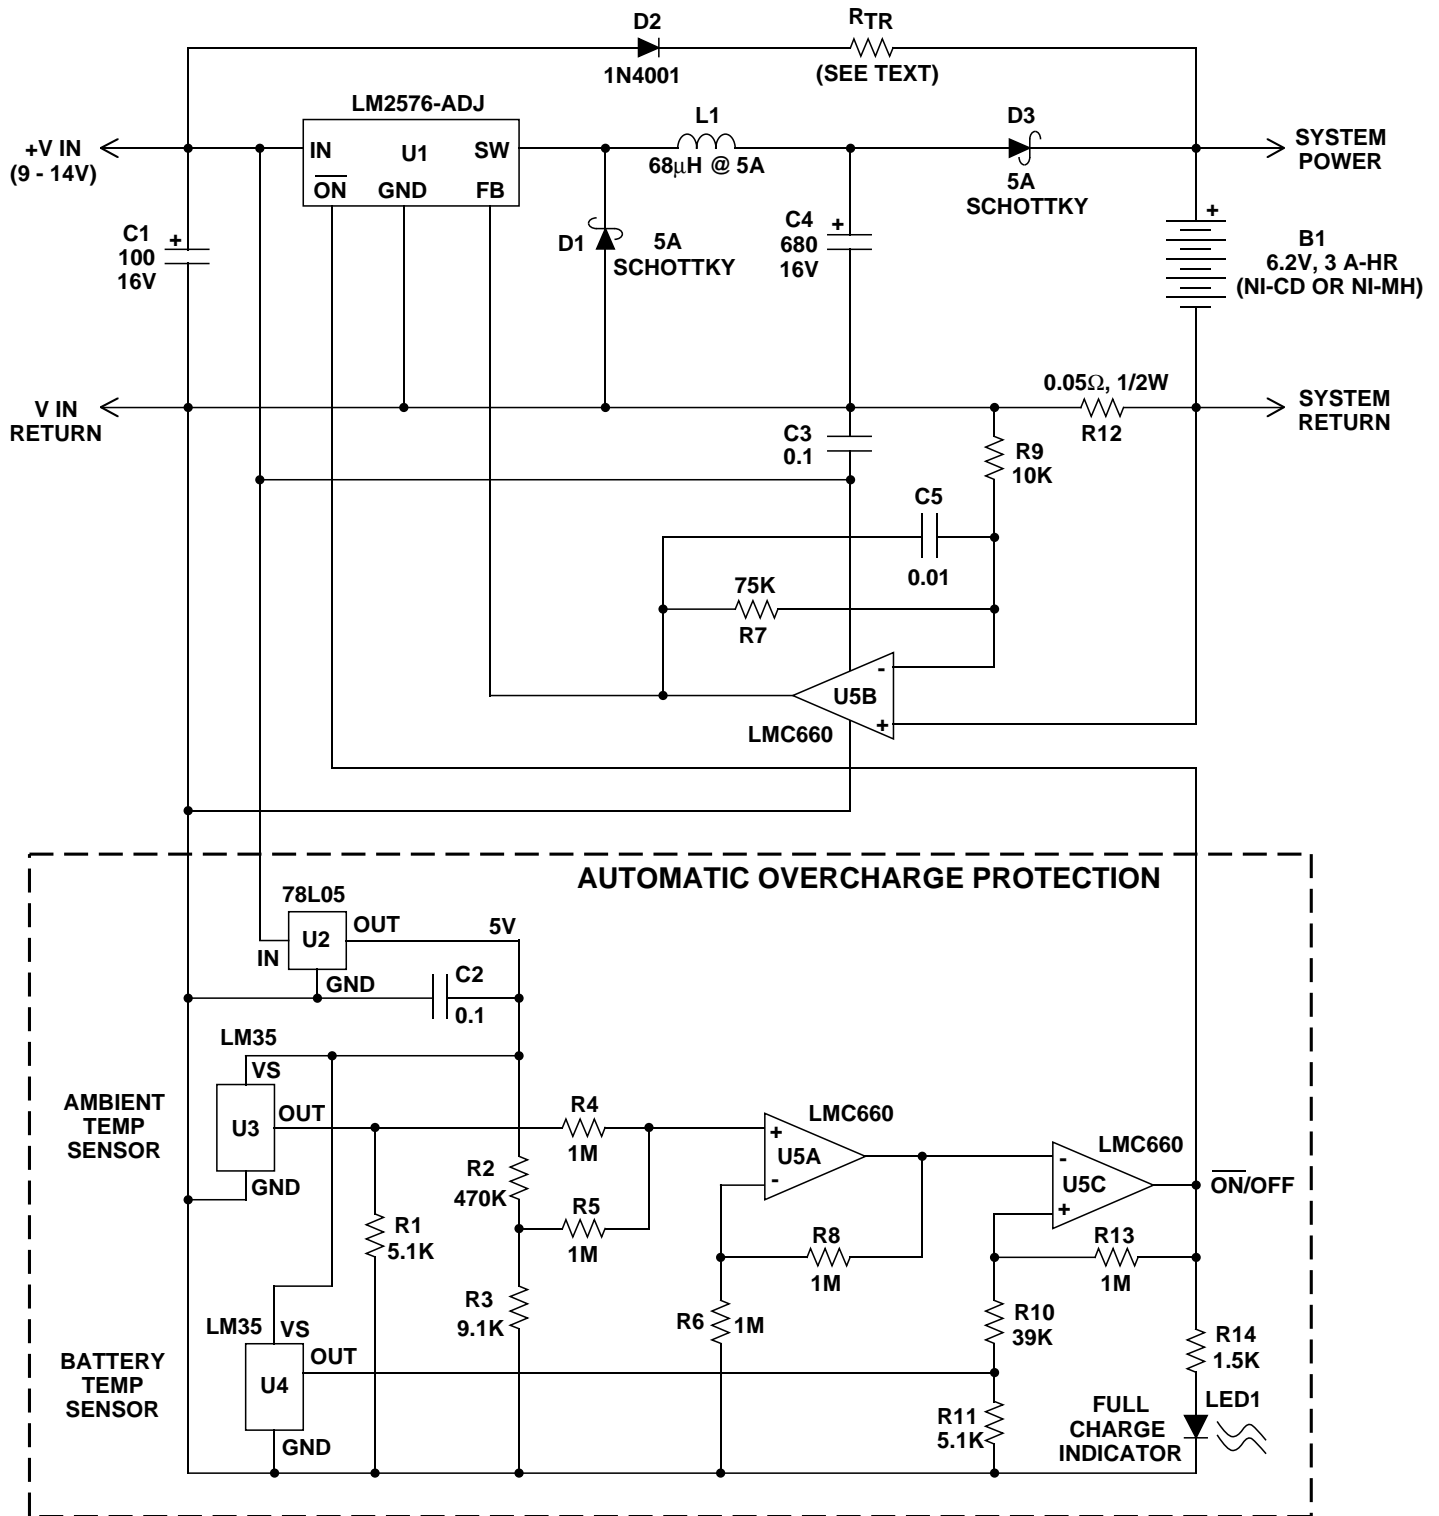

NOTES (UNLESS OTHERWISE SPECIFIED):

ALL CAPACITANCE VALUES ARE IN μF.
 ALL RESISTORS ARE 5%, 1/4 W.
 U1 REQUIRES SMALL HEATSINK (RTH < 15°C/W).
 C1 AND C4 MUST BE LOW ESR ALUMINUM ELECTROLYTIC.
 U5D IS NOT USED.