


Test Data Sender/
data logger

Baud rate must match
between data logger and
WiFi link. Change the
baud rate of WiFi link
from menu after reset.

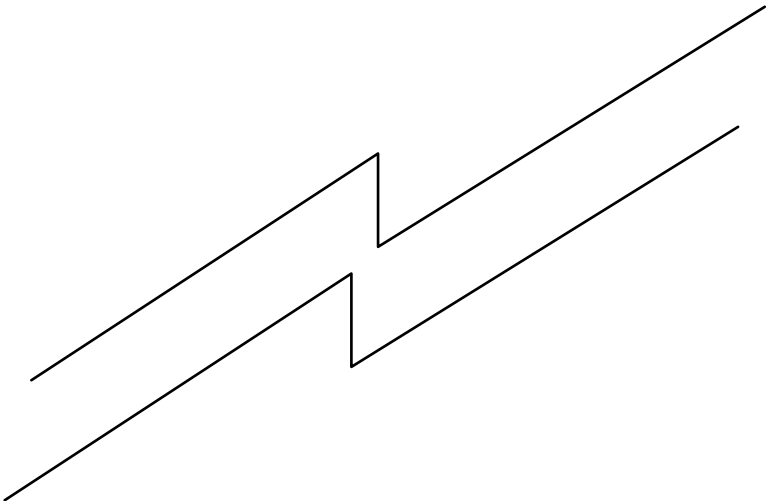

Telnet over WiFi

1. Connect laptop to WiFi
link access point.
2. Connect Putty to
192.168.1.1, port 23 as
Telnet client.
3. Tranfer file and click
copy to clipboard.



ESP32 WiFi Link