



Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

UF5400 THRU UF5408

Features

- High Surge Capability
- Low Leakage
- Low Forward Voltage Drop
- Ultra Fast Switching Speed For High Efficiency

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Typical Thermal Resistance 20°C/W

| MCC Catalog Number | Device Marking | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|--------------------|----------------|--|---------------------|-----------------------------|
| UF5400 | --- | 50V | 35V | 50V |
| UF5401 | --- | 100V | 70V | 100V |
| UF5402 | --- | 200V | 140V | 200V |
| UF5404 | --- | 400V | 280V | 400V |
| UF5406 | --- | 600V | 420V | 400V |
| UF5407 | --- | 800V | 560V | 800V |
| UF5408 | --- | 1000V | 700V | 1000V |


Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | | |
|---|-------------|--------------------------------------|--|
| Average Forward Current | $I_{F(AV)}$ | 3 A | $T_A = 55^\circ\text{C}$ |
| Peak Forward Surge Current | I_{FSM} | 150A | 8.3ms, half sine |
| Maximum Instantaneous Forward Voltage UF5400-5402 UF5404 UF5406-UF5408 | V_F | 1.0V 1.3V 1.7V | $I_{FM} = 3.0\text{A};$ $T_A = 25^\circ\text{C}$ |
| Reverse Current At Rated DC Blocking Voltage (Maximum DC) | I_R | 10 μA 50 μA | $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$ |
| Maximum Reverse Recovery Time UF5400-5404 UF5406-5408 | T_{rr} | 50ns 75ns | $I_F = 0.5\text{A}, I_R = 1.0\text{A},$ $I_{rr} = 0.25\text{A}$ |
| Typical Junction Capacitance UF5400-5404 UF5406-5408 | C_J | 75pF 50pF | Measured at 1.0MHz, $V_R = 4.0\text{V}$ |

*Pulse Test: Pulse Width 300 μsec , Duty Cycle 1%


3 Amp Ultra Fast Recovery Rectifier 50 to 1000 Volts

DO-201AD

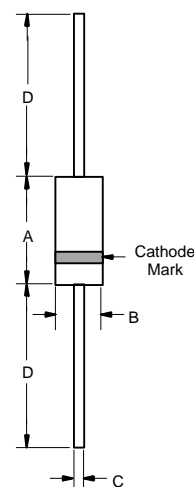


| DIMENSIONS | | | | | |
|------------|--------|------|-------|------|------|
| DIM | INCHES | | MM | | NOTE |
| | MIN | MAX | MIN | MAX | |
| A | --- | .370 | --- | 9.50 | |
| B | --- | .250 | --- | 6.40 | |
| C | .048 | .052 | 1.20 | 1.30 | |
| D | 1.000 | --- | 25.40 | --- | |

Figure 1
Typical Forward Characteristics

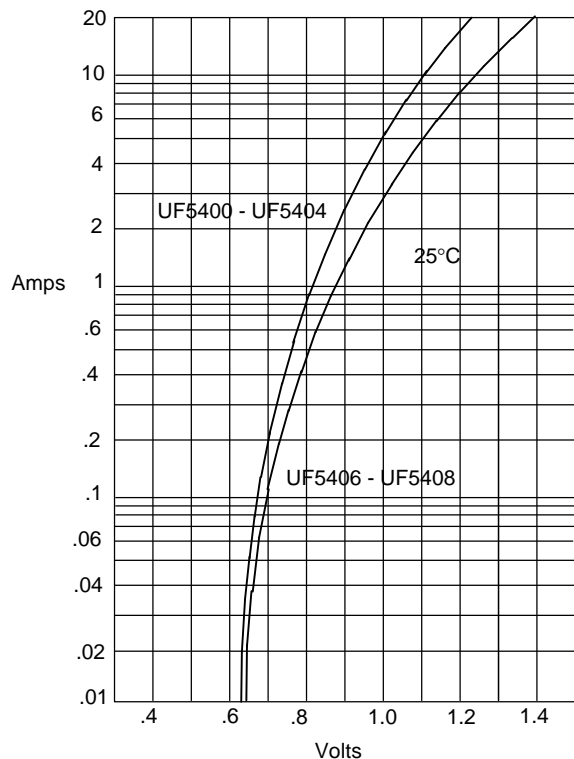


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

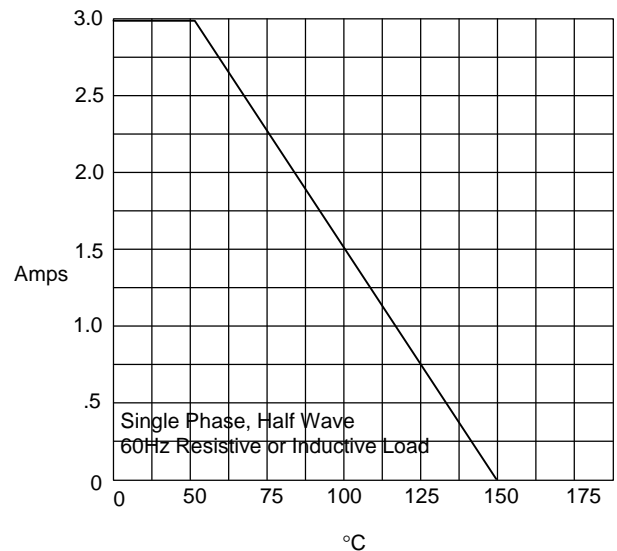

Average Forward Rectified Current - Amperes *versus*
Ambient Temperature - °C


Figure 3
Junction Capacitance

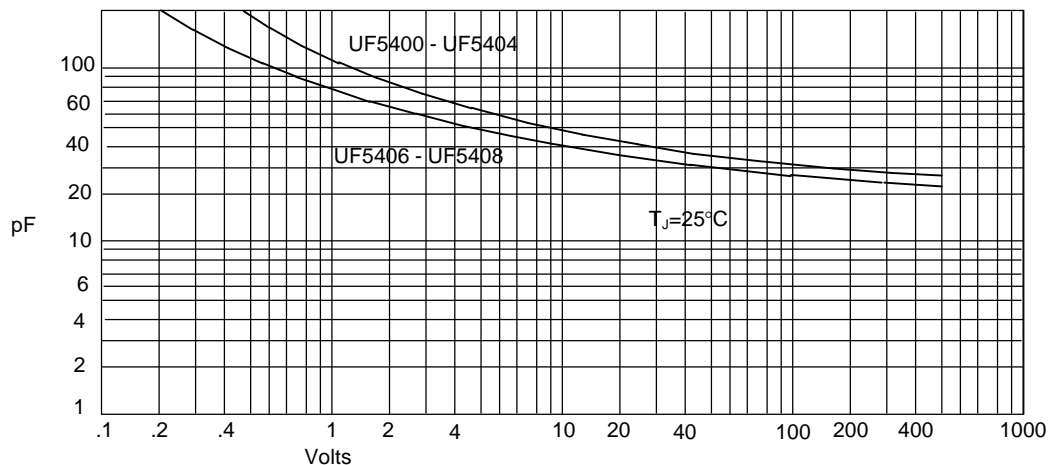

Junction Capacitance - pF *versus*
Reverse Voltage - Volts


UF5400 thru UF5408

Figure 4
Typical Reverse Characteristics

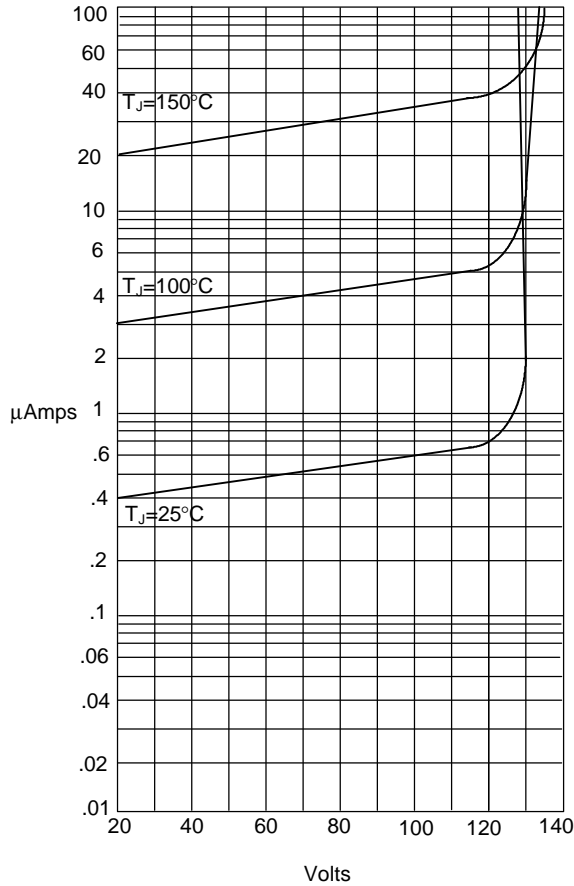


Instantaneous Reverse Leakage Current - MicroAmperes *versus*
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Peak Forward Surge Current

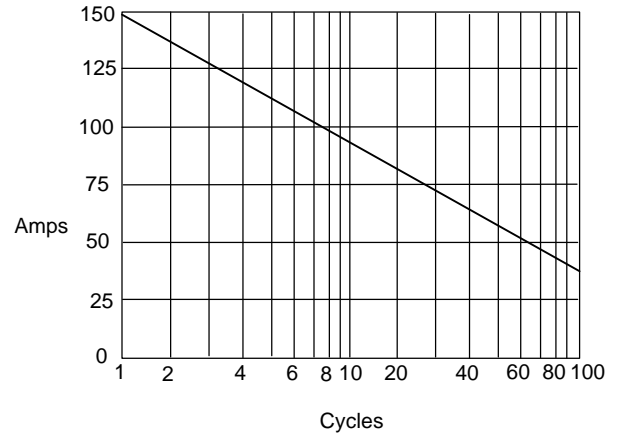


Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles

Figure 6
Reverse Recovery Time Characteristic And Test Circuit Diagram

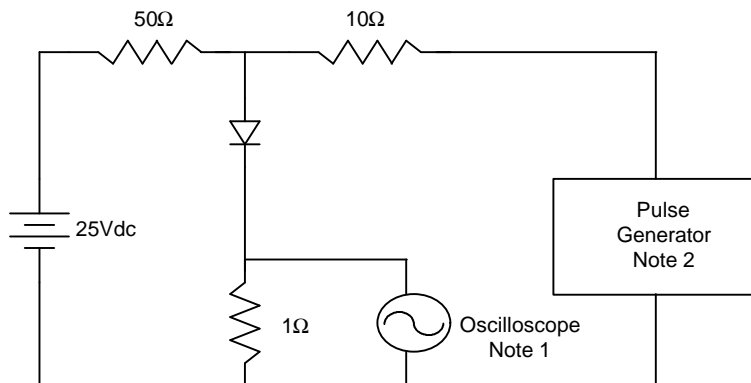

Notes:

1. Rise Time = 7ns max.
Input impedance = 1 megohm, 22pF
2. Rise Time = 10ns max.
Source impedance = 50 ohms
3. Resistors are non-inductive

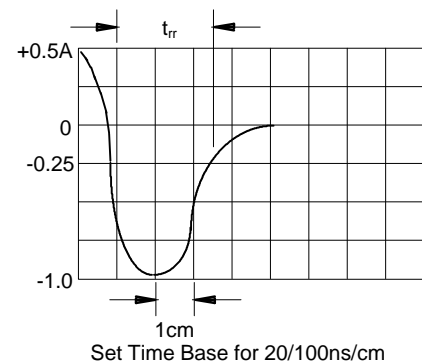

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.