
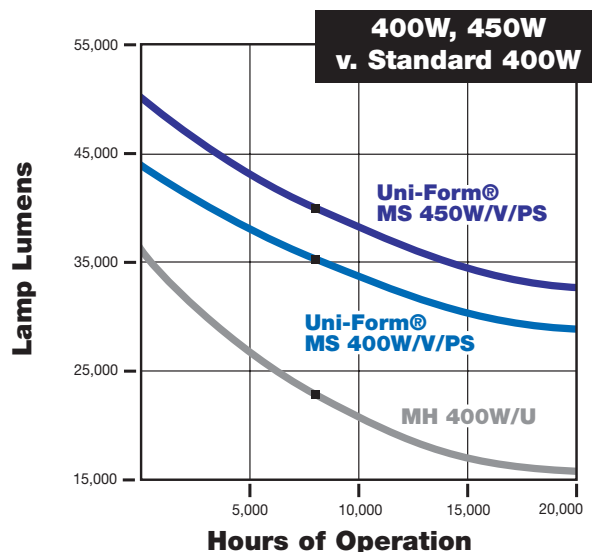
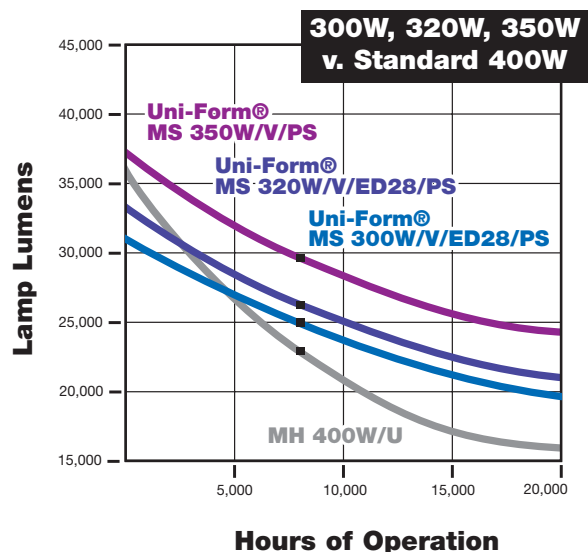
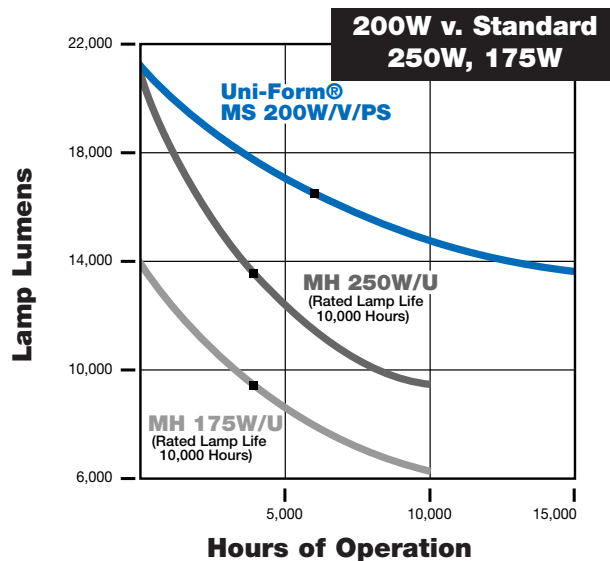


Lumen Maintenance *At a Glance*

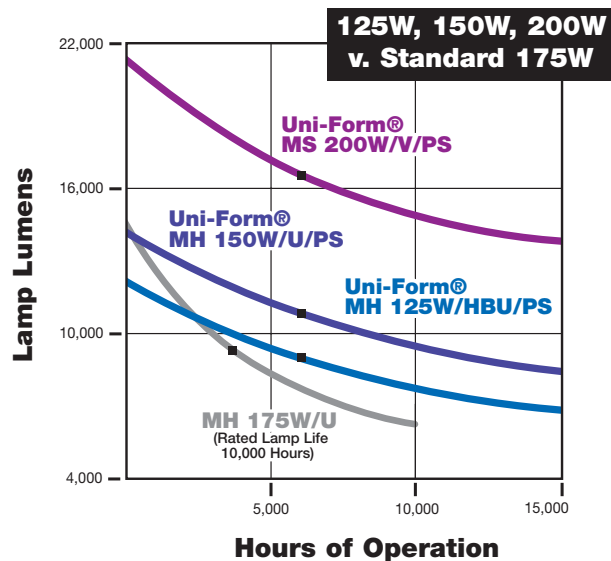

System Comparison Guide*

Lamp/Wattage	Lamp Description	Initial Lumens	Mean Lumens	Avg. Rated Life Hours	System Wattage CWA	System Wattage Uni-Form Opti-Wave®
125W Uni-Form	MH 125W/HBU/PS	12,000	8,400	15,000	150	141
150W Uni-Form	MH 150W/U/PS	14,000	10,500	15,000	190	170
200W Uni-Form	MS 200W/V/PS	21,000	16,800	15,000	232	219
175W STANDARD	MH 175W/U	14,000	9,100	10,000	210	-
250W STANDARD	MH 250W/U	21,000	13,700	10,000	289	-
300W Uni-Form	MS 300W/V/ED28/PS	31,000	25,000	20,000+	342	324
320W Uni-Form	MS 320W/V/ED28/PS	33,000	26,000	20,000+	368	349
350W Uni-Form	MS 350W/V/PS	37,000	29,000	20,000+	400	380
400W Uni-Form	MS 400W/V/PS	44,000	35,000	20,000+	450	435
450W Uni-Form	MS 450W/V/PS	50,000	40,000	20,000+	506	485
400W STANDARD	MH 400W/U	36,000	23,000	20,000	455	-

* All comparisons based on Venture brand products. Lamp ratings are based upon vertical ($\pm 15^\circ$) operation.

For the most complete specifications and up-to-date information, visit us on-line at venturelighting.com

UNI-FORM®
PULSE START METAL HALIDE LIGHTING SYSTEMS

(800) 451-2606 or (440) 248-3510 Fax (800) 451-2605
E-mail: venture@adlt.com venturelighting.com

© 2005 Venture Lighting International. Venture and Uni-Form are registered trademarks of Venture Lighting International.

VENTURE®
LIGHTING
An Advanced Lighting Technologies Company

VLI-0767B1-0805