


BPS Prototyping Boards


*Actual PCB is larger

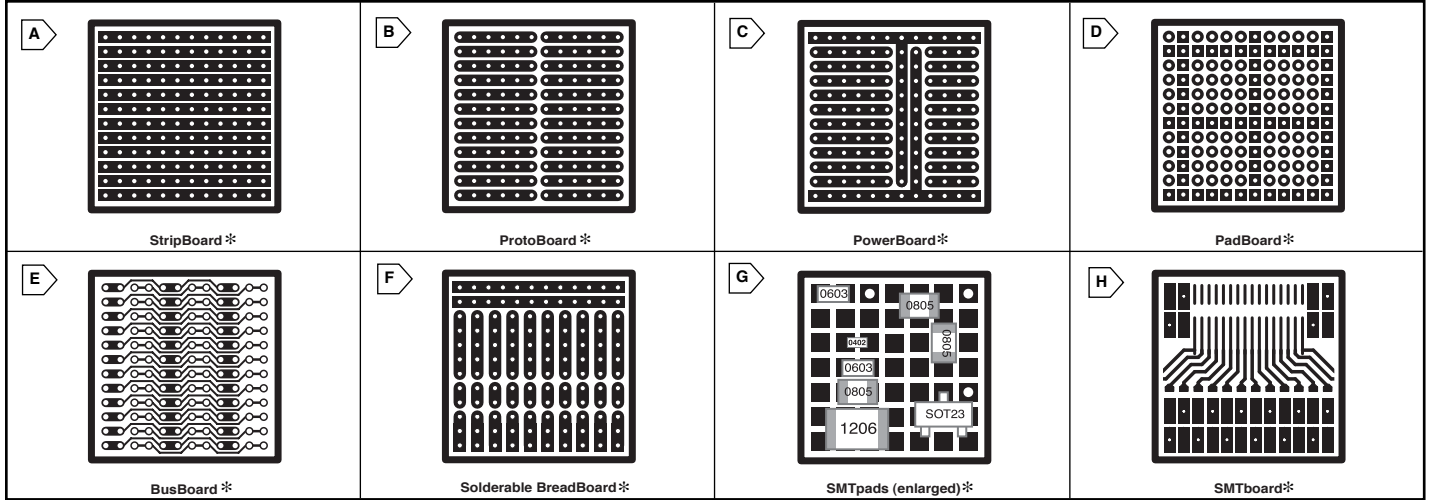

PROTOTYPING BOARDS

For quantities of 20 and up, call for quote.

MOUSER STOCK NO.	BPS Part No.	Fig.	Description	Size	Recommended Enclosures	Price Each	
						1	10
854-ST6U	ST6U	A	StripBoard-6U, 1 sided, general purpose	6.3 x 9.2 in (160 x 233.4mm)	- - -	25.16	22.64
854-ST3U	ST3U	A	StripBoard-3U, 1 sided, general purpose	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-PR3U	PR3U	B	ProtoBoard-3U, 1 sided, pre-cut strip board	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-PR3UC	PR3UC	B	ProtoBoard-3U-CONN, 1 sided, with connector footprints	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-POW3U	POW3U	C	PowerBoard-3U, 1 sided, with power and ground rails	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-PAD3U	PAD3U	D	PadBoard-3U, 2 sided, with plated holes	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-BB3U	BB3U	E	BusBoard-3U, 1 sided, with soldermask	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-BB3UC	BB3UC	E	BusBoard-3U-CONN, 1 sided, with connector footprints	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-BR1	BR1	F	Solderable Breadboard, 1 sided PCB	1.9 x 7.1 in (47 x 179mm)	- - -	6.50	5.85
854-SP3UT	SP3UT	G	SMTpads-3U-Thin, 2 sided, with unplated holes to ground plane	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-SMT3U	SMT3U	H	SMTboard-3U, 2 sided, with unplated holes to ground plane	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70
854-RF3U	RF3U	H	SMTboard-3U-Thin, 2 sided, with unplated holes to ground plane	3.9 x 6.3 in (100 x 160mm)	Hammond 1455L160 or 1455N160 Series	10.78	9.70

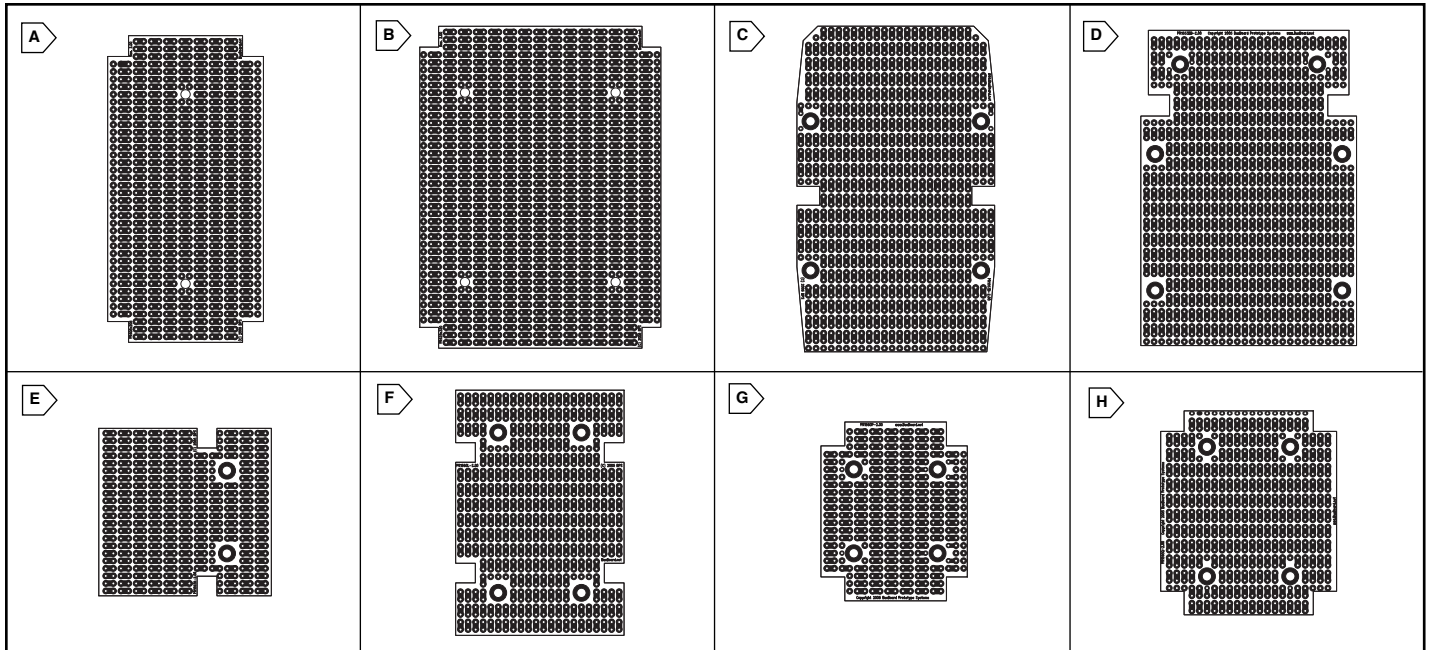

PROTOTYPING ENCLOSURE BOARDS

For quantities of 20 and up, call for quote.

Features:

- Designed for the box. No cutting required.
- Two hole ProtoBoard pattern
- One sided lead free etched copper PCB with a flux coating for easy soldering and to preserve solderability
- 4-40 PCB mounting screws provided
- 2, 4 or 6 screws are provided depending on the board

MOUSER STOCK NO.	BPS Part No.	Fig.	Size	Recommended Enclosures	Price Each	
					1	10
854-PR405X205	PR405X205	A	4.05 x 2.05 in. (103 x 53mm)	Hammond 1590B Diecast Aluminum	4.25	3.83
854-PR425X320	PR425X320	B	4.25 x 3.20 in. (108 x 81mm)	Hammond 1590BB Diecast Aluminum	6.00	5.40
854-PR1553B	PR1553B	C	2.8 x 4.3 in. (71 x 108mm)	Hammond 1553B Plastic Soft-sided	7.25	6.53
854-PR1553DB	PR1553DB	D	2.9 x 5.5 in. (74 x 139mm)	Hammond 1553DB Plastic Soft-sided, w/ Battery Compartment	9.00	8.10
854-PR1593K	PR1593K	E	2.3 x 2.3 inches (58 x 58mm)	Hammond 1593K Plastic	4.10	3.69
854-PR1593L	PR1593L	F	3.3 x 2.3 in. (83 x 58mm)	Hammond 1593L Plastic	5.00	4.50
854-PR1593P	PR1593P	G	1.9 x 2.4 in. (49 x 60mm)	Hammond 1593P Plastic with Battery Compartment	4.10	3.69
854-PR1593Q	PR1593Q	H	2.4 x 2.7 in. (62 x 69mm)	Hammond 1593Q Plastic with Battery Compartment	5.00	4.50