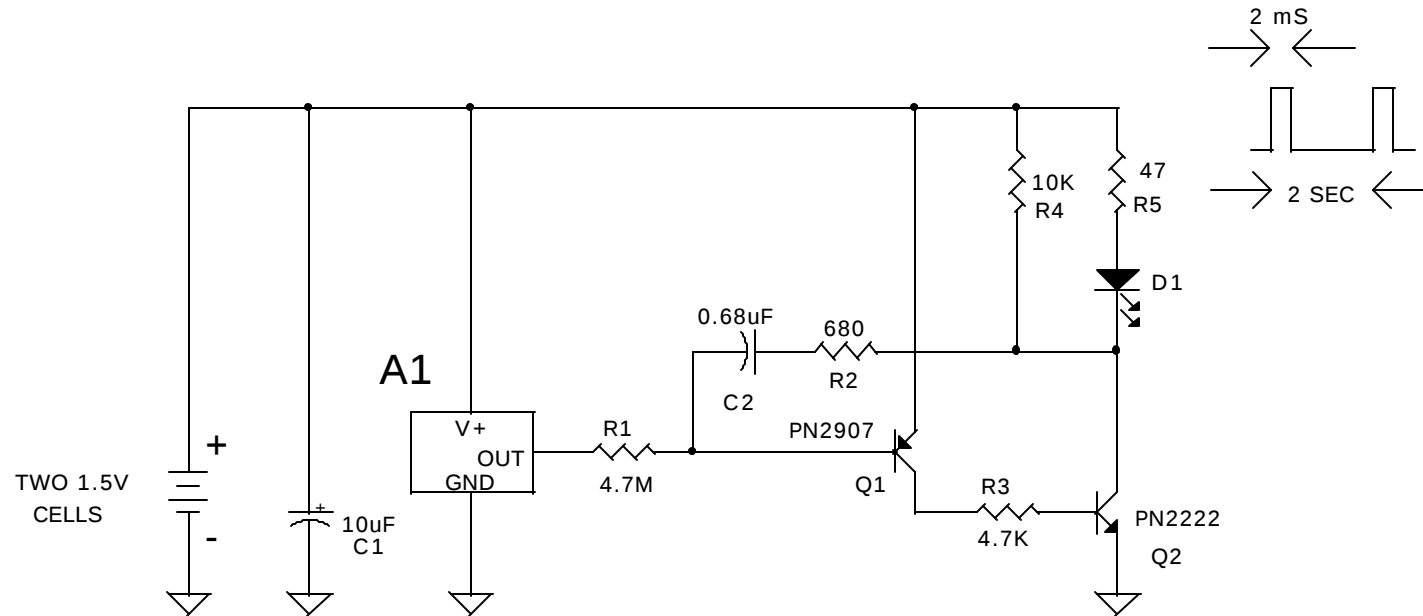


TOP VIEW
PANASONIC MN13811-G
2.4V TRIP POINT

STANDBY CURRENT = 1uA

AVERAGE CURRENT = 20uA WHEN FLASHING

DRAWN BY: DAVE JOHNSON

UNDER VOLTAGE LED FLASHER

DAVID JOHNSON AND ASSOCIATES		
UNDER-VOLTAGE LED FLASHER CIRCUIT		
Size A	Document Number UNDRVFLS.DSN	Rev A
Date:	Thursday, December 24, 1998	Sheet 1 of 1