Coaxial Video, Data and 12V Transceiver






FEATURES

- Video, camera power and RS485 over a standard coaxial cable
- Video transmission (1000m max.)
- Power transmission 12Vdc 1A (600m max.)
- Data transmission RS485 half duplex both way (38400bauds max.)
- The set includes: transmitter, receiver and power supply 230VAC/40VDC

SPE	CIF	CAT	IONS

Video Input(s)	1 CH Composite, BNC female, 1Vpp	
Data Inferface	RS485 half duplex both way	
Power output	12Vdc 1A (600m max.)	
Supply Voltage	230Vac/40Vdc (1.4A)power adaptor incl.	
Power Consumption	(max.) 60 W	
Dimensions w*h*d	100 x 75 x 26.75 mm	

Configuration

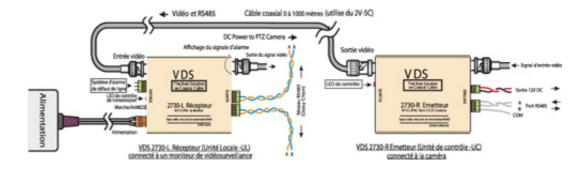



Design and specifications are subject to change without notice

Status 01/2008

AASSET SECURITY SA

153, rue Michel Carré F-95100 Argenteuil Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74

info@aasset-security.com www.aasset-security.com