

## Dual Output Regulated Switched Capacitor Voltage Converter

### General Description

The LM2685 CMOS charge-pump voltage converter operates as an input voltage doubler, +5V regulator and inverter for an input voltage in the range of +2.85V to +6.5V. Five low cost capacitors are used in this circuit to provide up to 50mA of output current at +5V ( $\pm 5\%$ ), and 15mA at -5V. The LM2685 operates at a 130 kHz switching frequency to reduce output resistance and voltage ripple. With an operating current of only 800 $\mu$ A (operating efficiency greater than 80% with most loads) and 6 $\mu$ A typical shutdown current, the LM2685 is ideal for use in battery powered systems. The device is in a small 14-pin TSSOP package.


### Features

- +5V regulated output
- Inverts  $V_{O5}(+5V)$  to  $V_{NEG}(-5V)$
- Doubles input supply voltage
- TSSOP-14 package
- 80% typical conversion efficiency at 25mA
- Input voltage range of 2.85V to 6.5V
- Independent shutdown control pins

### Applications

- Cellular phones
- Pagers
- PDAs
- Handheld instrumentation
- 3.3V to 5V voltage conversion applications

### Typical Application and Connection Diagram

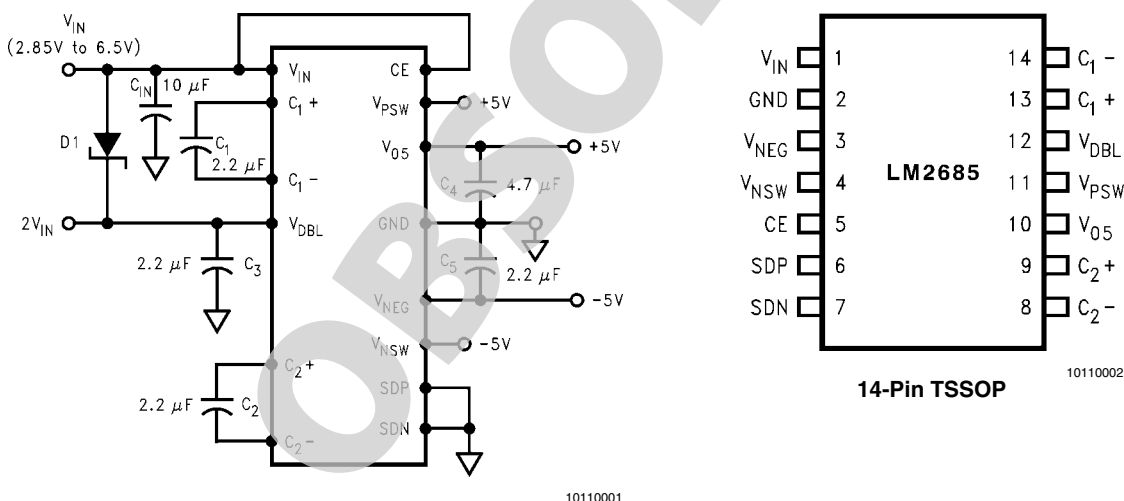

### Ordering Information

Order Number	Package Type	NSC Package Drawing	Supplied As
LM2685MTC	TSSOP-14	MTC14	94 Units, Rail
LM2685MTCX	TSSOP-14	MTC14	2.5k Units, Tape and Reel

## Pin Descriptions

Pin No.	Name	Function
1	$V_{IN}$	Power supply input voltage.
2	GND	Power supply ground.
3	$V_{NEG}$	Negative output voltage created by inverting $V_{05}$ .
4	$V_{NSW}$	$V_{NEG}$ output connected through a series switch, NSW.
5	CE	Chip enable input. This pin is high for normal operation and low for shutdown. (See Shutdown and Load Disconnect section in the Detailed Device Description division).
6	SDP	Positive side shutdown input. This pin is low for normal operation and high for positive side shutdown and $V_{PSW}$ load disconnect. (See Shutdown and Load Disconnect section in the Detailed Device Description division).
7	SDN	Negative side shutdown input. This pin is low for normal operation and high for negative side shutdown and $V_{NSW}$ load disconnect. (See Shutdown and Load Disconnect section in the Detailed Device Description division).
8	$C_2^-$	The negative terminal of inverting charge-pump capacitor, C2.
9	$C_2^+$	The positive terminal of inverting charge-pump capacitor, C2.
10	$V_{05}$	Regulated +5V output.
11	$V_{PSW}$	$V_{05}$ output connected through a series switch, PSW.
12	$V_{DBL}$	Voltage Doubler Output. ( $2.85V \leq V_{IN} \leq 5.4V$ . See Voltage Doubler section).
13	$C_1^+$	The positive terminal of doubling charge-pump capacitor, C1.
14	$C_1^-$	The negative terminal of doubling charge-pump capacitor, C1.

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage ( $V_{IN}$ to GND or GND to $V_{NEG}$ )	6.8V
SDN, SDP, CE	(GND – 0.3V) to ( $V_{IN} + 0.3V$ )
$V_{O5}$ Continuous Output Current	80mA
$V_{O5}$ Short-Circuit Duration to GND (Note 2)	Indefinite

Continuous Power Dissipation ( $T_A = 25^\circ\text{C}$ ) (Note 3)	600mW
$T_{JMAX}$ (Note 3)	150°C
$\theta_{JA}$ (Note 3)	140°C/W
Operating Ambient Temp. Range	–40°C to 85°C
Operating Junction Temp. Range	–40°C to 125°C
Storage Temp. Range	–65°C to 150°C
Lead Temp. (Soldering, 10 sec.)	300°C
ESD Rating (Note 4)	2kV

## Electrical Characteristics

Limits with standard typeface apply for  $T_J = 25^\circ\text{C}$ , and limits in **boldface type** apply over the full temperature range. Unless otherwise specified  $V_{IN} = 3.6V$ ,  $C_1 = C_2 = C_3 = C_5 = 2.2\mu\text{F}$ ,  $C_4 = 4.7\mu\text{F}$  (Note 5)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V^+$	Supply Voltage		<b>2.85</b>		<b>6.5</b>	V
$I_Q$	Supply Current	No Load		800	<b>1600</b>	$\mu\text{A}$
		No Load, $V_{IN} = 6.5V$		300	<b>600</b>	
$I_{SD}$	Shutdown Supply Current	$V_{IN} = 6.5V$		6	30	$\mu\text{A}$
$V_{SD}$	Shutdown Pin Input Voltage for CE, SDP, SDN	Logic Input High @ 6.5V	<b>2.4</b>			V
		Logic Input Low @ 6.5V			<b>0.8</b>	
$I_L (+5V)$	Output Current at $V_{O5}$	$2.85V < V_{IN} < 6.5V$			<b>50</b>	mA
$R_O (-5V)$	Output Resistance at $V_{NEG}$	$I_L = 15\text{mA}$ (Note 6)		20	<b>40</b>	$\Omega$
$F_{SW}$	Switch Frequency		<b>85</b>	130	<b>180</b>	kHz
$P_{EFF}$	Average Power Efficiency at $V_{O5}$	$2.85V \leq V_{IN} \leq 6.5V$ $I_L = 25\text{mA}$ to GND		82		%
$V_{O5}$	Output Regulation	$1\text{mA} < I_L < 50\text{mA}$ , $V_{IN} = 6.5V$ (Note 7)	4.848	5.05	5.252	V
		$1\text{mA} < I_L < 50\text{mA}$ , $V_{IN} = 6.5V$ (Note 7)	<b>4.797</b>	5.05	<b>5.303</b>	
$G_{LINE}$	Line Regulation	$2.85V < V_{IN} < 3.6V$		0.25		%/V
		$3.6V < V_{IN} < 6.5V$		0.05		
$G_{LOAD}$	Load Regulation	$1\text{mA} < I_L < 50\text{mA}$ , $V_{IN} = 6.5V$		0.3	1.0	%
$R_{SW}$	Series Switch Resistance $V_{NEG}$ to $V_{NSW}$	$V_{IN} > 2.85V$		1.5		$\Omega$
	$V_{O5}$ to $V_{PSW}$			5.0		

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics.

**Note 2:**  $V_{O5}$  may be shorted to GND without damage. However, shorting  $V_{NEG}$  to  $V_{O5}$  may damage the device and must be avoided. Also, for temperature above 85°C,  $V_{O5}$  must not be shorted to GND or device may be damaged.

**Note 3:** The maximum allowable power dissipation is calculated by using  $P_{DMAX} = (T_{JMAX} - T_A)/\theta_{JA}$ , where  $T_{JMAX}$  is the maximum junction temperature,  $T_A$  is the ambient temperature and  $\theta_{JA}$  is the junction-to-ambient thermal resistance of the specified package.

**Note 4:** The human body model is a 100 pF capacitor discharged through a 1.5k $\Omega$  resistor into each pin.

**Note 5:** In the typical operating circuit, capacitors  $C_1$  and  $C_2$  are 2.2 $\mu\text{F}$ , 0.3 $\Omega$  maximum ESR capacitors. Capacitors with higher ESR will increase output resistance, reduce output voltage and efficiency.


**Note 6:** Specified output resistance includes internal switch resistance and ESR of capacitors. See the Detailed Device Description section.

**Note 7:** The 50 mA maximum current assumes no current is drawn from  $V_{DBL}$  pin. See Voltage Doubler section in the Detailed Device Description.

# Typical Performance Characteristics


Unless otherwise specified,  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = 3.6\text{V}$ .

## Supply Current vs Input Voltage

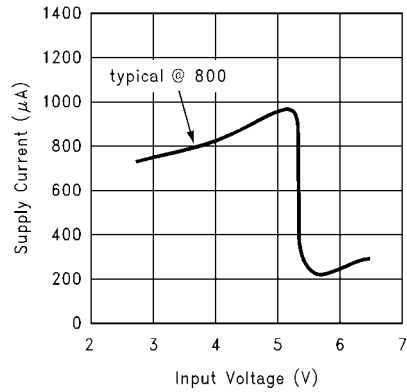


10110006

## Supply Current vs Temperature

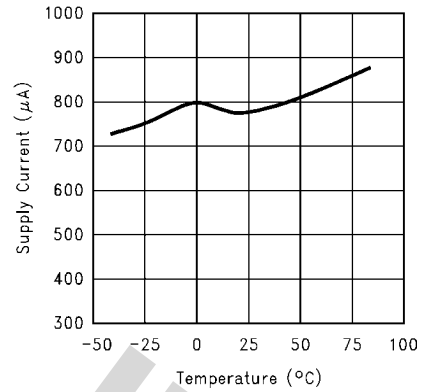


10110007

## Efficiency vs Load Current

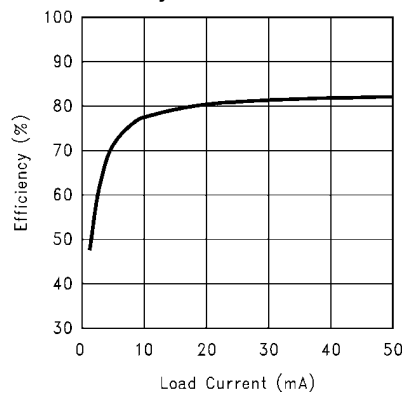


10110008

## Output Voltage ( $V_{O5}$ ) vs. Load Current

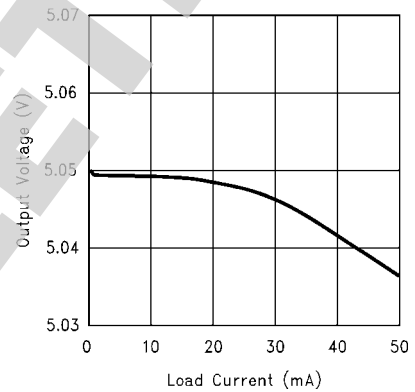


10110009

## $V_{O5}$ Voltage vs. Input Voltage

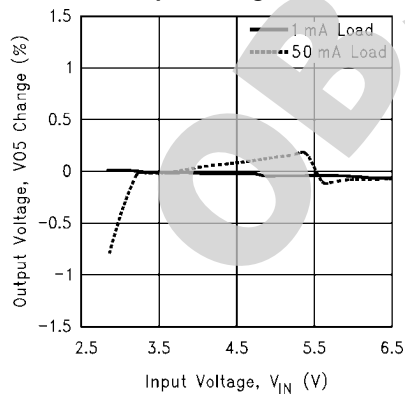


10110021

## Output Resistance ( $V_{NEG}$ ) vs. Temperature

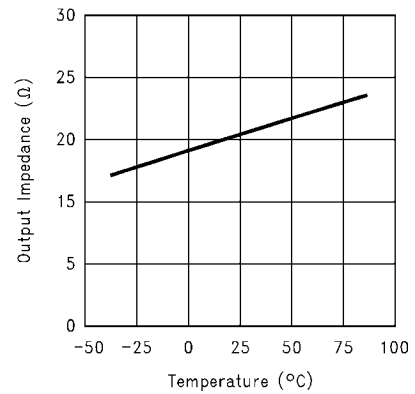


10110010

Output Resistance (VDBL) vs. Input Voltage

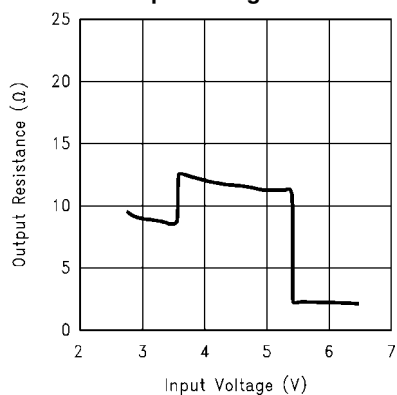


10110011

Output Resistance (VDBL) vs. Temperature

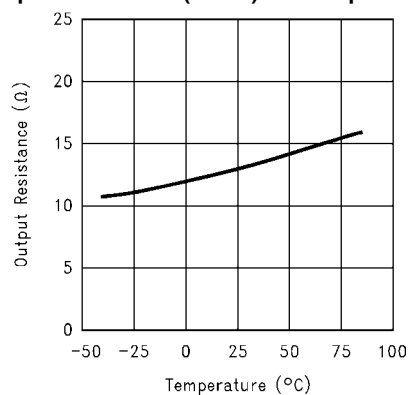


10110012

Switch Frequency vs. Temperature

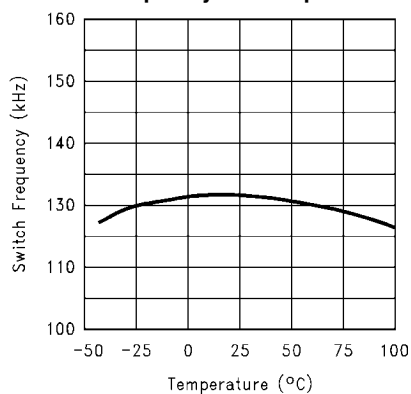


10110013


Line Transient Response (with 5mA Load)

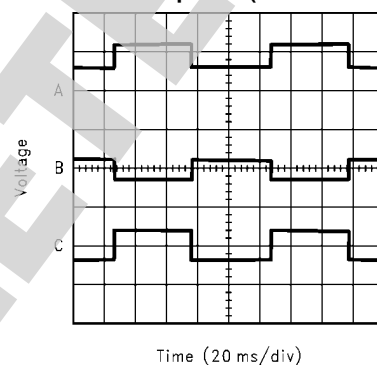

10110014

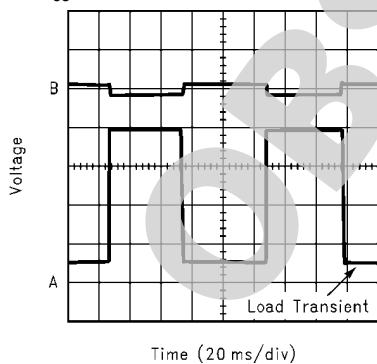A: INPUT VOLTAGE:  $V_{IN} = 3.2V$  to  $6.0V$ ,  $5V/div$ B: OUTPUT VOLTAGE:  $V_{PSW} = 100mV/div$ C: OUTPUT VOLTAGE:  $V_{NSW} = 100mV/div$  $V_{O5}$  Load Transient Response


10110015

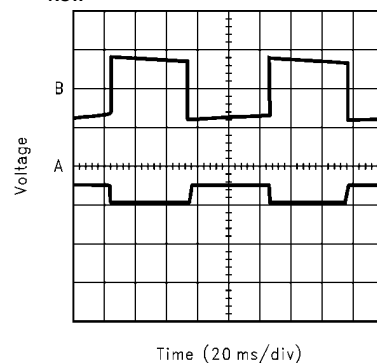A: LOAD CURRENT:  $I_{LOAD} = 5mA$  to  $39.6mA$ ,  $10mA/div$ B: OUTPUT VOLTAGE:  $V_{O5} = 10mV/div$  $V_{NSW}$  Load Transient Response

10110016

A: LOAD CURRENT:  $I_{LOAD} = 4.4mA$  to  $-9.4mA$ ,  $10mA/div$ B: OUTPUT VOLTAGE:  $V_{NSW} = 50mV/div$


**$V_{PSW}$  and  $V_{NSW}$  Response to CE  
(with 5mA Load)**

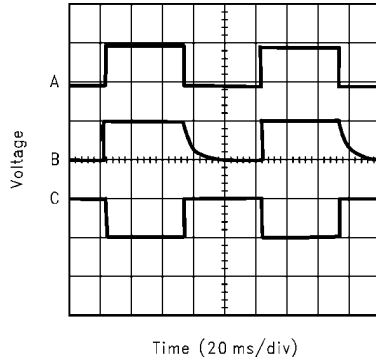

10110017

A: CE INPUT: 5V/div  
B: OUTPUT VOLTAGE:  $V_{PSW}$ : 5V/div  
C: OUTPUT VOLTAGE:  $V_{NSW}$ : 5V/div


**$V_{O5}$  Response to SDP (with 5mA Load)**

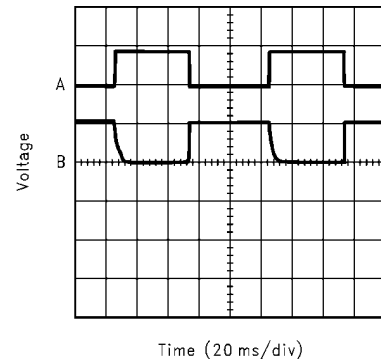

10110018

A: SDP INPUT: 5V/div  
B: OUTPUT VOLTAGE: 5V/div


**$V_{NSW}$  Response to SDP (with 5mA Load)**

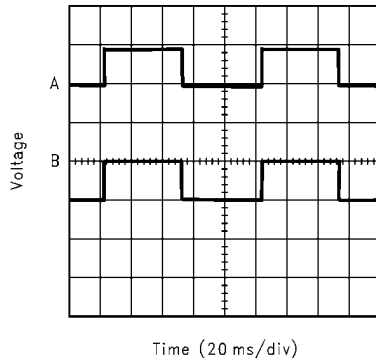

10110019

A: SDP INPUT: 5V/div  
B: OUTPUT VOLTAGE ( $V_{NSW}$ ): 5V/div

**$V_{NSW}$  Response to SDN  
(with 5mA Load)**

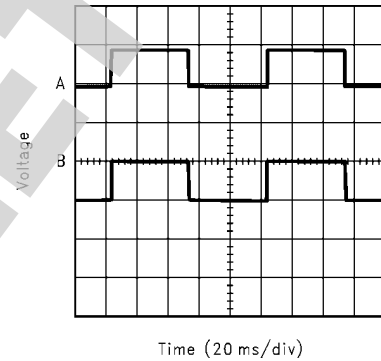

10110020

A: SDN INPUT: 5V/div  
B: OUTPUT VOLTAGE ( $V_{NSW}$ ): 5V/div

## Detailed Device Description

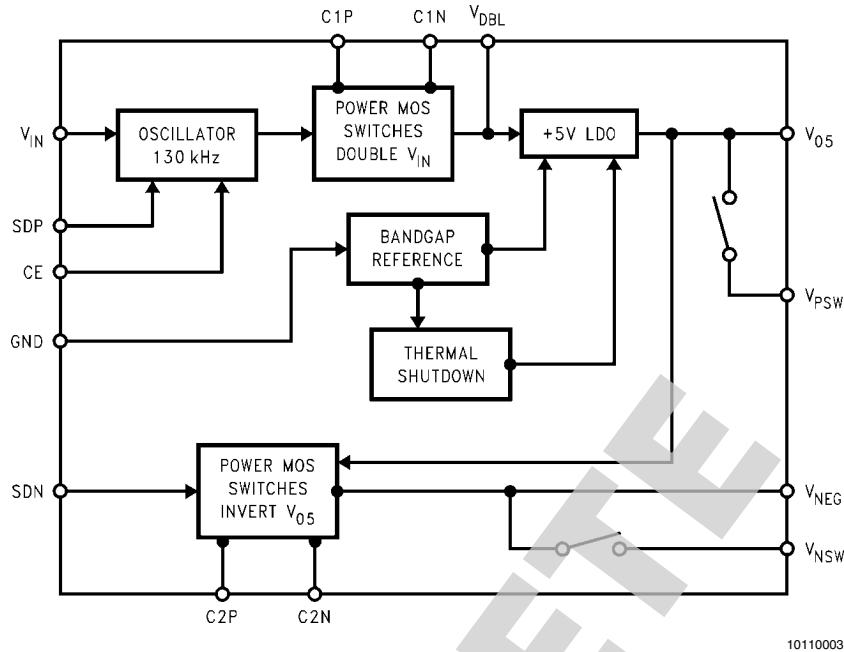


FIGURE 1. Functional Block Diagram

The LM2685 CMOS charge pump voltage converter operates as an input voltage doubler, +5V regulator and inverter for an input voltage in the range of +2.85V to +6.5V. It delivers maximum load currents of 50mA and 15mA for the regulated +5V and the inverted output voltages respectively, with an operating current of only 800µA. It also has a typical shutdown current of 6µA. All these performance qualities make the LM2685 an ideal device for battery powered systems.

The LM2685 has three main functional blocks: a voltage doubler, a low dropout (LDO) regulator, and a voltage inverter. Figure 1 shows the LM2685 functional block diagram.

### VOLTAGE DOUBLER

The voltage doubler stage doubles the input voltage  $V_{IN}$ , within the range of +2.85V to +5.4V. For  $V_{IN}$  above 5.4V, the doubler shuts off and the input voltage is passed directly to  $V_{DBL}$  via an internal power switch.

The doubler contains four large CMOS switches which are switched in a sequence to double the input supply voltage. Figure 2 illustrates the voltage conversion scheme. When S2 and S4 are closed, C1 charges to the supply voltage  $V_{IN}$ . During this time interval, switches S1 and S3 are open. In the next time interval, S2 and S4 are opened at the same time, S1 and S3 are closed, the sum of the input voltage  $V_{IN}$  and the voltage across C1 gives the  $2V_{IN}$  and the voltage across C2 gives the  $2V_{IN}$  at  $V_{DBL}$  output.  $V_{DBL}$  supplies the LDO regulator. It is recommended not to load  $V_{DBL}$  when  $V_{O5}$  has a load of 50mA. For proper operation, the sum of  $V_{DBL}$  and  $V_{O5}$  loads must not be more than 50mA.

The Schottky diode D1 is only needed for start-up. The internal oscillator circuit uses the  $V_{DBL}$  and GND pins. The voltage across them must be larger than 1.8V to ensure the operation of the oscillator. During start-up, D1 is used to charge up the voltage at  $V_{DBL}$  pin to start the oscillator; it also protects the device from turning on its own parasitic diode and potentially latching up. The diode should have enough current carrying

capability to change capacitor C3 at start-up, as well as a low forward voltage to prevent the internal parasitic diode from turning on. A Schottky diode like 1N5817 can be used for most applications. If the input ramp is less than 10V/ms, a smaller schottky diode like MBR0520LT1 can be used to reduce the circuit size.

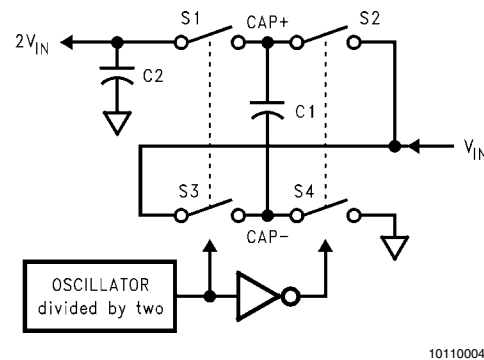


FIGURE 2. Voltage Doubler Principle

### +5 LDO REGULATOR

$V_{DBL}$  is the input to an LDO regulator that regulates it to a +5 output voltage at  $V_{O5}$ .  $V_{PSW}$  is tied to  $V_{O5}$  through a series switch PSW. The LDO output capacitor (4.7µF Tantalum) may be tied to either  $V_{O5}$  or  $V_{PSW}$ .

### INVERTER

From the  $V_{O5}$  output, a -5V output is created at  $V_{NEG}$  by means of an inverting charge pump. This negative output is unregulated, meaning that its output will droop as the load current at  $V_{NEG}$  increases. The inverter contains four large CMOS switches which are in a sequence to invert the input supply voltage. Figure 3 illustrates the voltage conversion

scheme. When S1 and S3 are closed, C1 charges to the supply voltage  $V_{05}$ . During this time interval, switches S2 and S4 are open. In the second time interval, S1 and S3 are open; at the same time, S2 and S4 are closed, C1 is charging C2. After a number of cycles, the voltage across C2 will be pumped to  $V_{05}$ . Since the anode of C2 is connected to ground, the output at the cathode of C2 equals  $-(V_{05})$  when there is no load current. The output voltage drop when a load is added is determined by the parasitic resistance ( $R_{ds(on)}$  of the MOSFET switches and the ESR of the capacitors) and the charge transfer loss between capacitors.

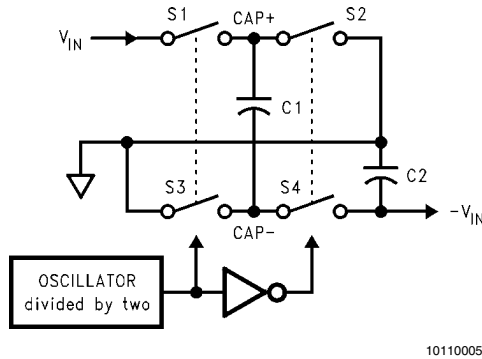


FIGURE 3. Voltage Inverter Principle

### SHUTDOWN AND LOAD DISCONNECT

In addition to the nominal charge pump and regulator functions, the LM2685 features shutdown and load disconnect circuitry. CE (chip enable) and SDP (shutdown positive) perform the same task with opposite input polarities. When CE is low or SDP is high, all circuit blocks are disabled and  $V_{05}$  falls to ground potential. This is the same result as when the die temperature exceeds 150°C (typical), and the device's internal thermal shutdown is triggered.

Forcing SDN (shutdown negative) high disables only the inverting charge pump. The doubling charge pump and the LDO regulator continue to operate, so the  $V_{05}$  and the  $V_{PSW}$  remain at 5V.

The LM2685 incorporates two low impedance switches tied to the  $V_{05}$  and  $V_{NEG}$  outputs, because some special applications require load disconnect and this is achievable via the switches. Switch PSW connects  $V_{05}$  to  $V_{PSW}$ , and switch NSW connects  $V_{NEG}$  to  $V_{NSW}$ . In normal operation, these switches are closed, allowing 5V loads to be tied to either  $V_{05}$  or  $V_{PSW}$  and -5V loads to be tied to either  $V_{NEG}$  or  $V_{NSW}$ . Driving SDN high opens switch NSW only, while forcing CE low or SDP high, opens both the PSW and NSW.

## Application Information

### CAPACITOR SELECTION

The output resistance and ripple voltage are dependent on the capacitance and ESR values of the external capacitors.

### VOLTAGE DOUBLER EXTERNAL CAPACITORS

The selection of capacitors are based on the specifications of the dropout voltage (which equals  $I_{OUT} R_{OUT}$ ), the output voltage ripple, and the converter efficiency.

$$R_{OUT} = 2 R_{SW} + \frac{2}{f_{OSC} \times C_1} + 4 ESR_{C1} + ESR_{C3}$$

where  $R_{SW}$  is the sum of the ON resistance of the internal MOSFET switches as shown in Figure 2.

The peak-to-peak output voltage ripple is determined by the oscillator frequency, the capacitance and ESR of the capacitor C3.

$$V_{RIPPLE} = \frac{I_L}{f_{OSC} \times C_2} + 2 \times I_L \times ESR_{C3}$$

High capacitance (2.2μF to higher), low ESR capacitors can reduce the output resistance and the voltage ripple.

$$\text{Power efficiency of} = \frac{P_{OUT}}{P_{IN}} = \frac{I_L^2 R_L}{I_L^2 R_L + I_L^2 R_{OUT} + I_Q (V+)}$$

where  $I_Q(V+)$  is the quiescent power loss of the IC device, and  $I_L^2 R$  is the conversion loss associated with the switch on-resistance, the two external capacitors and their ESRs.

Low ESR capacitors (table to be referenced) are recommended to maximize efficiency, reduce the output voltage drop and voltage ripple.

### +5 LDO REGULATOR EXTERNAL CAPACITORS

The voltage doubler output capacitor, C3, serves as the input capacitor of the +5 LDO regulator. The output capacitor C4, must meet the requirement for minimum amount of capacitance and appropriate ESR (Equivalent Serving Resistance) for proper operation. The ESR value must remain within the regions of stability as shown in Figure 4, Figure 5 and Figure 6 to ensure output's stability. A minimum capacitance of 1μF is required at the output. This can be increased without limit, but a 4.7μF tantalum capacitor is recommended for loads ranging up to the maximum specification. With lighter loads of less or equal to 10mA, ceramic capacitor of at least 1μF and ESR in the milliohms can be used. This has to be connected to  $V_{PSW}$  pin instead of the  $V_{05}$  pin.

Any output capacitor used should have a good tolerance over temperature for capacitance and ESR values. The larger the capacitor, with ESR within the stable region, the better the stability and noise performance.

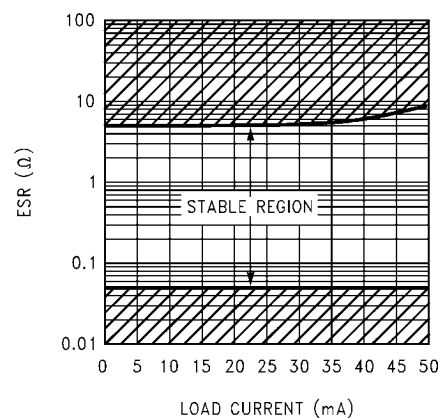


FIGURE 4. ESR Curve for  $C_{OUT} = 2.2\mu F$



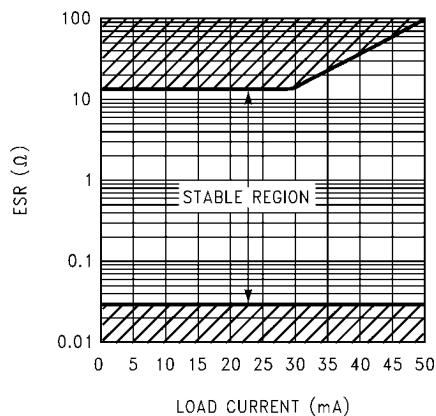


FIGURE 5. ESR Curve for  $C_{OUT} = 4.7\mu F$


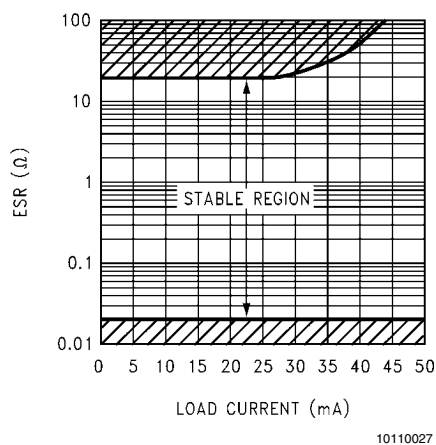


FIGURE 6. ESR Curve for  $C_{OUT} = 10\mu F$

#### INVERTER EXTERNAL CAPACITORS

As discussed in the +5 LDO Regulator External Capacitors section, the output resistance and ripple voltage are dependent on the capacitance and ESR values of the external capacitors. A minimum of  $1\mu F$  capacitor with good tolerance over temperature for capacitance and ESR values. The capacitance value can be increased without limit while still maintain high low ESR value.  $2.2\mu F$  capacitors are recommended for the two external capacitors,  $C_2$  and  $C_5$  of the inverter.

# Physical Dimensions inches (millimeters) unless otherwise noted

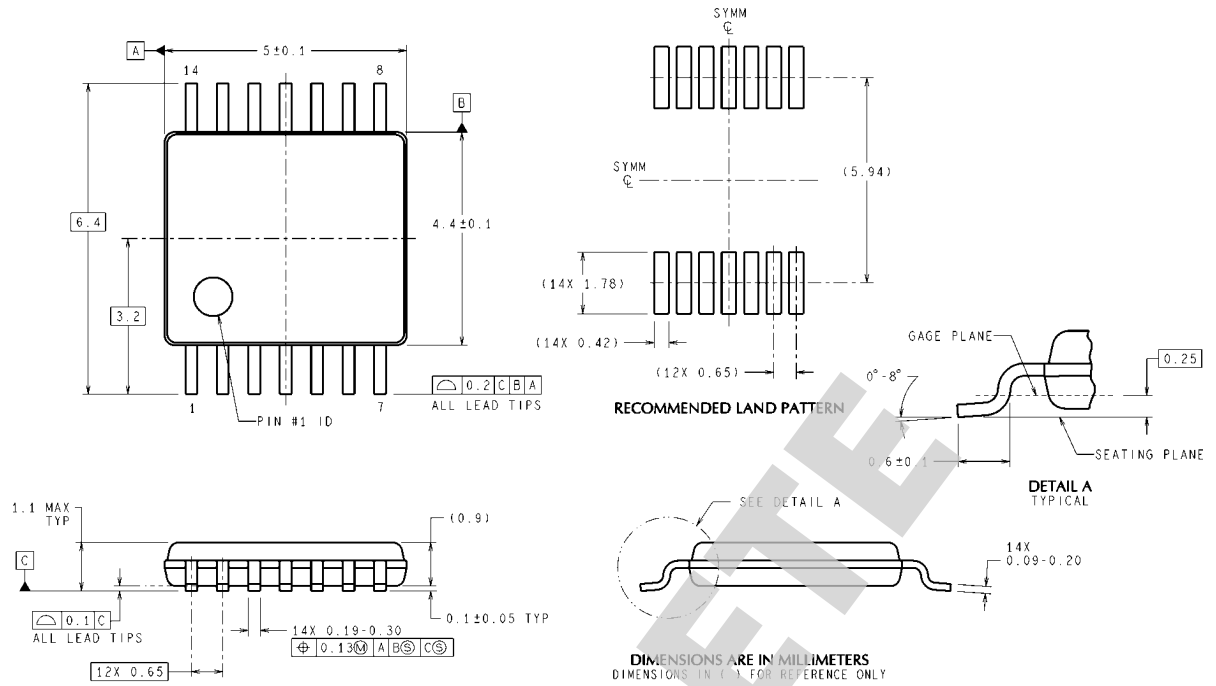

**TSSOP-14 Package**  
**14-Lead Thin Shrink Small-Outline Package**  
**For Ordering, Refer to Ordering Information Table**  
**NS Package Number MTC14**

MTC14 (Rev D)

## Notes

**OBSOLETE**

## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:  
[www.national.com](http://www.national.com)

Products		Design Support	
Amplifiers	<a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>	WEBENCH® Tools	<a href="http://www.national.com/webench">www.national.com/webench</a>
Audio	<a href="http://www.national.com/audio">www.national.com/audio</a>	App Notes	<a href="http://www.national.com/appnotes">www.national.com/appnotes</a>
Clock and Timing	<a href="http://www.national.com/timing">www.national.com/timing</a>	Reference Designs	<a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>
Data Converters	<a href="http://www.national.com/adc">www.national.com/adc</a>	Samples	<a href="http://www.national.com/samples">www.national.com/samples</a>
Interface	<a href="http://www.national.com/interface">www.national.com/interface</a>	Eval Boards	<a href="http://www.national.com/evalboards">www.national.com/evalboards</a>
LVDS	<a href="http://www.national.com/lvds">www.national.com/lvds</a>	Packaging	<a href="http://www.national.com/packaging">www.national.com/packaging</a>
Power Management	<a href="http://www.national.com/power">www.national.com/power</a>	Green Compliance	<a href="http://www.national.com/quality/green">www.national.com/quality/green</a>
Switching Regulators	<a href="http://www.national.com/switchers">www.national.com/switchers</a>	Distributors	<a href="http://www.national.com/contacts">www.national.com/contacts</a>
LDOs	<a href="http://www.national.com/ldo">www.national.com/ldo</a>	Quality and Reliability	<a href="http://www.national.com/quality">www.national.com/quality</a>
LED Lighting	<a href="http://www.national.com/led">www.national.com/led</a>	Feedback/Support	<a href="http://www.national.com/feedback">www.national.com/feedback</a>
Voltage References	<a href="http://www.national.com/vref">www.national.com/vref</a>	Design Made Easy	<a href="http://www.national.com/easy">www.national.com/easy</a>
PowerWise® Solutions	<a href="http://www.national.com/powerwise">www.national.com/powerwise</a>	Applications & Markets	<a href="http://www.national.com/solutions">www.national.com/solutions</a>
Serial Digital Interface (SDI)	<a href="http://www.national.com/sdi">www.national.com/sdi</a>	Mil/Aero	<a href="http://www.national.com/milaero">www.national.com/milaero</a>
Temperature Sensors	<a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a>	SolarMagic™	<a href="http://www.national.com/solarmagic">www.national.com/solarmagic</a>
PLL/VCO	<a href="http://www.national.com/wireless">www.national.com/wireless</a>	PowerWise® Design University	<a href="http://www.national.com/training">www.national.com/training</a>

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2011 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



[www.national.com](http://www.national.com)

**National Semiconductor  
Americas Technical  
Support Center**  
Email: [support@nsc.com](mailto:support@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Technical Support Center**  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)

**National Semiconductor Asia  
Pacific Technical Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Technical Support Center**  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)