



Catalog Number HKP, HKP-HH, and HKP-W

STANDARD FUSEHOLDERS:

For use with 1/4" x 1-1/4" fuses
(Edison type ABC, AGC, MDL, MDA
etc.)

Terminals: Bayonet-type knob.
Vibration resistant.
For panels up to 5/16"
(7.9mm) thick.


Agency Approvals:

UL Recognized, Guide IZLT2,
File E14853
CSA Certified, Class 6225-01,
File 47235

Electrical Ratings for HPF Series

Catalog Symbol	Amps	Volts	Fuse Description
HKP	30	250	—
HKP-HH	15	250	HKP with 1/4" Quick-connect terminal
HKP-W	30	250	HKP with drip-proof knob.

Dimensional Data

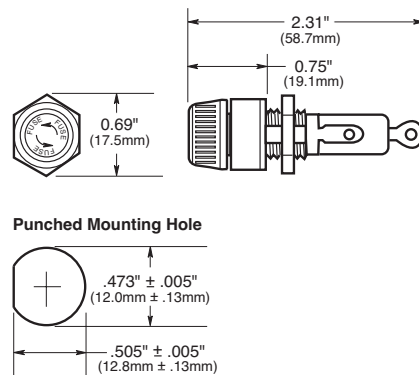

Catalog Number HPF

STANDARD FUSEHOLDERS WITH SCREW-TYPE KNOB:

For use with 13/32" x 1-5/16" to 1-1/2"
fuses.

Agency Approvals:


UL Recognized, Guide IZLT2,
File E14853
CSA Certified, Class 6225-01,
File 47235
UL 94VO Flammability Rating

Electrical Ratings

Catalog Symbol	Amps	Volts	Fuse Description
HPF	30	600	1-1/2" (38.1mm) MOL, MEN, MCL
HPF-L	5	600	EBS, 13/32" x 1-3/8" fuses
HPF-EE	15	480	SEC 0-15, 13/32" x 1-3/8" fuses
HPF-JJ	20	480	SEC 20, 13/32" x 1-13/32" fuses
HPF-FF*	30	300	SEC 25 & 30, 13/32" x 1-5/8" fuses
HPF-RR	30	600	HCLR, HCTR & EDCC Class CC fuses
HPF-WT	30	600	Splash-proof knob for 1-1/2" fuses

*No CSA Certification.

Dimensional Data

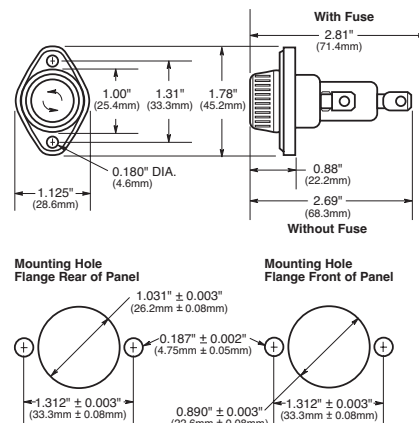

Catalog Number HRK

UNIVERSAL IN-LINE FUSEHOLDER:

For use with 1/4" x 7/8" to 1-1/4" fuses

Voltage Rating: 32V, 15A

Electrical Ratings for HPF Series

Catalog Symbol	Amps	Volts	Fuse Description
HRK	15	32	1/4" diameter fuses of different lengths

FEATURES

- Three springs furnished with fuseholder afford acceptance of 1/4" fuses of different lengths.
- Wire leads are staked and soldered to the contacts of the fuseholder.
- Leads are 8" (203mm) long.
- Wire size - #14.

Dimensional Data

