

Product Data sheet : Current Transformer- CT1231

Date : 19.11.07


Rev : 02

Page 1 of 1

Customer: Standard Type

Customer's part No.: ---

MECHANICAL DIMENSIONS

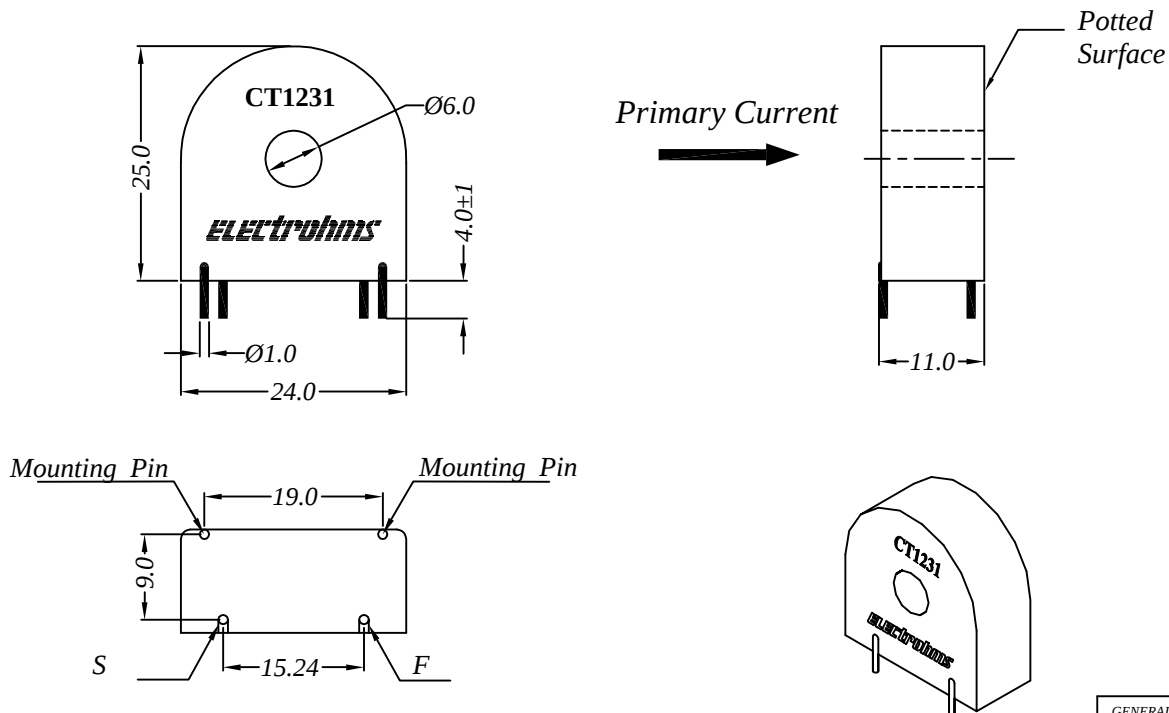

Termination:- F : Finish, S : Start

GENERAL TOL. ±0.5 mm	
ALL DIMENSIONS ARE IN 'mm'	SCALE - NTS

FEATURES :

- Low cost CT for class 1 whole Current Application.
- Encapsulated & P.C. Mountable.

SPECIFICATIONS **

PARAMETERS	VALUES
Current Range	0.25 – 20 Arms*
Frequency of Operation	50/60 Hz
D C R@ 25°C	105 - 135 Ω Nominal
Turns Ratio	1 : 2500
Recommended Secondary Burden	30.0 Ω (Resistive)
Amplitude Error	<0.3%
Phase Error	<1.0°
Operating Temperature Range	- 10 °C to + 60 °C.

** Specifications subject to change.

* If max Current is 5Arms, then employ 4turns on primary for optimum use

Note :

Amplitude error and Phase error values are guaranteed with recommended Secondary burden. Refer to ELECTROHMS Product Design Group for use of burden other than recommended Secondary burden.

Electrohms Pvt. Ltd.,

#881/B, Dr. M.C Modi Hospital Road,
Basaveshwaranagar,
Bangalore - 560 086,India

Tel: +91 (80) 23220025
Fax: +91 (80) 23224756
www.electrohms.com
e-mail: Sales@electrohms.com