ZGA25RP Series Ø25mm

Motor features:

Metal gears Good reliability Sleeve bearing Eccentric shaft available

Typical application:

Induction stopcock Strongbox Automatic valve




Gear Motor Data:

Part. number	Voltage	No-load speed	No-load Current	Rated speed	Rated current	RateTorque	Stall Torque	Gearbox Length
	VDC	RPM	AMP	RPM	AMP	Kg.cm	Kg.cm	MM
ZGA25RP-1256-10	12V	560	0.020	425	0.227	0.18	0.27	19
ZGA25RP-1256-23	12V	243	0.020	185	0.227	0.42	0.63	19
ZGA25RP-1256-32	12V	175	0.020	133	0.227	0.59	0.88	19
ZGA25RP-1256-51	12V	109	0.020	83	0.277	0.94	1.41	22
ZGA25RP-1256-71	12V	78	0.020	60	0.277	1.30	1.95	22
ZGA25RP-1256-98	12V	57	0.020	43	0.277	1.82	2.73	22
ZGA25RP-1256-557	12V	10	0.020	7	0.277	11.16	16.74	27
ZGA25RP-2447-10	24V	470	0.028	357	0.098	0.22	0.33	19
ZGA25RP-2447-23	24V	204	0.028	155	0.098	0.50	0.75	19
ZGA25RP-2447-32	24V	146	0.028	110	0.098	0.70	1.05	19
ZGA25RP-2447-51	24V	92	0.028	70	0.098	1.10	1.65	22
ZGA25RP-2447-71	24V	66	0.028	50	0.098	1.54	2.31	22
ZGA25RP-2447-98	24V	47	0.028	36	0.098	2.14	3.21	22
ZGA25RP-2447-557	24V	8.4	0.028	6.3	0.098	12.22	18.33	27

FOR YOUR KIND ATTENTION: The data above is only for your informations, for further more specifications & questions, please contact us at sales@zhengke.cn

Appearence Size:

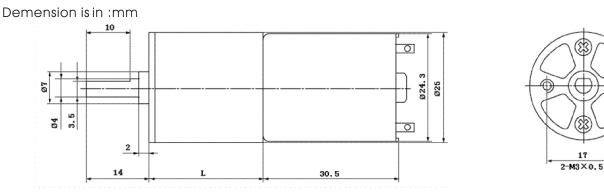

Packing information: 0.10Kg/PC approx, 100PCS/CTN, CTN: 34x37x32CM

