


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal sliicon junction ,majority carrier conduction
- Guard ring for overcoltage protection
- Low power loss,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling , and polarity protection applications
- Dual rectifier construction
- High temperature soldering guaranteed: 250°C/10 seconds

0.25"(6.35mm)from case

MECHANICAL DATA

- Case:** JEDEC DO-220AB molded plastic body
- Terminals:** lead solderable per MIL-STD-750,method 2026
- Polarity:** As marked. No suffix indicates Common Cathode, suffix "A" indicates Common Anode
- Mounting Position:** Any
- Weight:** 0.08 ounce, 2.24 grams

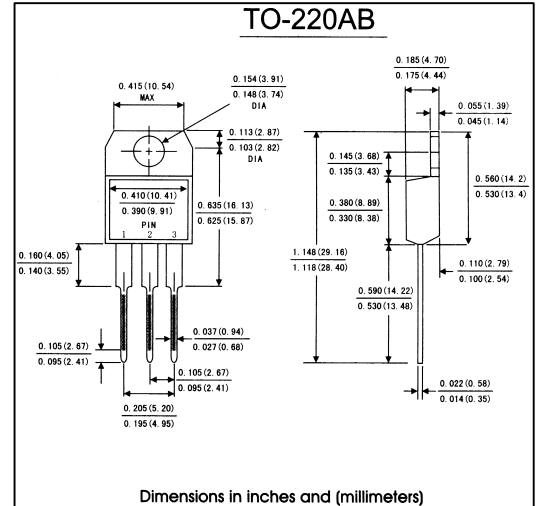

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified,Single phase, half wave, resistive or inductive)

load. For capacitive load, derate by 20%)

	Symbols	SR1620	SR1630	SR1640	SR1650	SR1660	SR1680	SR16A0	Units
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	57	71	Volts
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	Volts
Macimum average forward rectified current(see Fig.1)	I _(AV)	16.0							Amps
Repetitive peak forward current(square wavr, 20KHz) at T _c =105°C	I _{FRM}	32.0							Amps
Peak forward surge current 8.3ms singel half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150.0							Amps
Maximum instantaneous forward voltage at 10 A(Note 1)	V _F	0.65			0.75		0.80	0.85	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	TA=25°C	1.0							mA
	TA=125°C	30			50				
Typeical thermal resistance(Note 2)	R θ _{JC}	3.0							°C/W
Operating junction temperature range	T _J	-65 to +125			-65 to +150				°C
storage temperature range	T _{STG}	-65 to +150							°C

Notes: 1. Pulse test: 300 μs pulse width, 1% duty cycle

2. Thermal resistance from junction to case

RATINGS AND CHARACTERISTIC CURVES SR1620 THRU SR16A0

FIG.1-FORWARD CURRENT DERATING CURVE

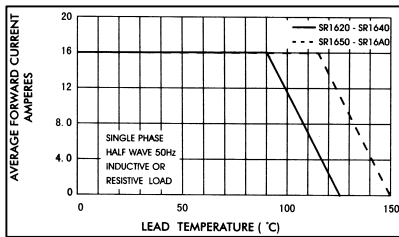


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

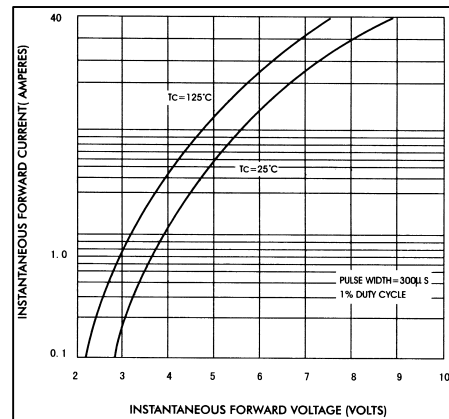


FIG.4-TYPICAL JUNCTION CAPACITANCE

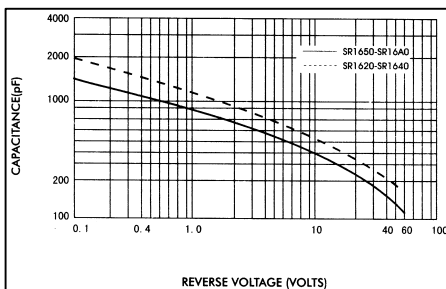


FIG.3-TYPICAL REVERSE CHARACTERISTICS

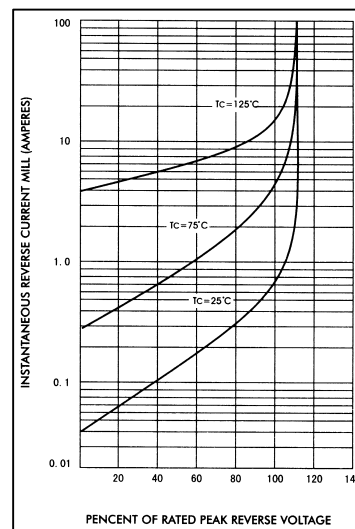


FIG.5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

