

# Comata 2.4 GHz SMD Antenna

**Product Specification** 

## 1 Features


- Designed for 2.4 GHz applications [Bluetooth™, WiFi™ (802.11b/g), Zigbee™, WiMedia™ etc.]
- · Intended for SMD mounting
- · Supplied in tape on reel

## 2 Description

The Comata antenna is intended for use with all 2.4 GHz applications. The antenna requires a groundplane, i.e. your device acts as an active part of the antenna and thus demand careful consideration concerning its placement.

## 3 Application

- · Handheld devices
- Headsets
- Laptops
- Sensors








## **Contents**

1 Features	1
2 Description	1
3 Application	1
4 Model name	3
5 General data	3
6 Electrical characteristics	3
7 Electrical performance	4
7-1 Voltage Standing Wave Ratio	4
7-2 3D-Radiation	4
7-3 Radiation patterns	4
8. Antenna Dimensions	5
9 Antenna Foot print	5
10 Electrical interface	6
10-1 Transmission line and matching	6
10-2 Test board dimensions	6
10-3 Test board matching	6
11 Soldering	7
11-1 Recommended soldering conditions	7
11-2 Leadfree soldering	7
12 Reliability	7
12-1 Temperature and Humidity	7
12-2 Mechanical	8
12-3 Miscellaneous	8
12-4 Judgement standard	8
13 Hazardous Material Regulation Conformance	8
14 Application example	9
15 Packaging	10
15-1 Shelf storage recommendation	10
15-2 Tape characteristics	10
15-3 Reel dimension	10
15-4 Box dimension	11
15-5 Bag properties	11
15-6 Reel label information	11



## 4 Model name



## 5 General data

Product Name	Comata 2.4 GHz
Article No.	3030A6111-01
Frequency	2.4-2.5 GHz
Polarization	Linear
Operating temperature	-40 to + 85 degC
Impedance	50 Ohm
Weight	0.4 gram
Antenna type	SMD

## **6 Electrical characteristics**


	Characteristics			Conditions*
	Min	Тур	Max	Conditions
Peak Gain	dBi	dBi	dBi	Fraguency 2.4.2.5 CHz Magaured in 2D chamber (near field)
Efficiency	50%	55%	60%	Frequency 2.4-2.5 GHz, Measured in 3D chamber ( near field)
VSWR	<2:1	<2:1	<2:1	Frequency 2.4-2.5 GHz, Measured in Network Analyzer

<sup>\*</sup>Note all data provided in this table are based on the gigaAnt reference board




## 7 Electrical performance


## 7-1 Voltage Standing Wave Ratio

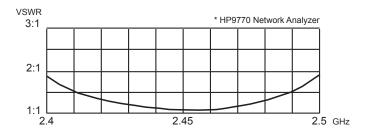

### 7-2 3D-Radiation




## 7-3 Radiation patterns

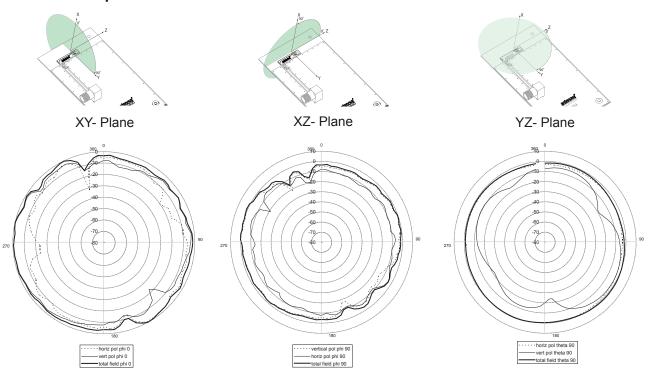




## 8. Antenna Dimensions

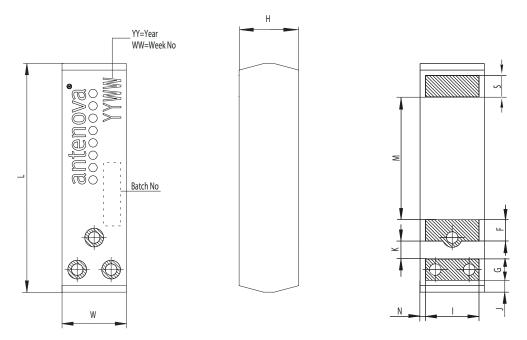

L	W	Н	G	F	S	- 1	J	K	М	N
Length	Width	Height	Ground	Feed	Solder					
12.8 ±0.3	3.6 ±0.2	3.3±0.2	1.2±0.1	1.2±0.1	1.2±0.1	3.0±0.1	0.65±0.25	1.0±0.1	6.9±0.2	0.3±0.1

Dimensions in millimeters

## 9 Antenna Foot print

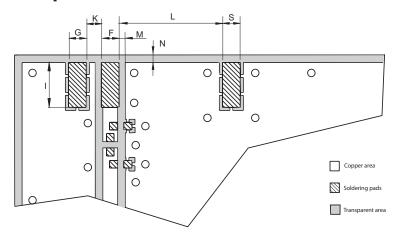


G	F	S	1	К	L	М	N
Ground	Feed	Solder					
1.2±0.1	1.2±0.1	1.2±0.1	3.0±0.1	1.0±0.1	6.9±0.2	0.4±0.1	0.5±0.1

Dimensions in millimeters




## 10 Electrical interface

### 10-1 Transmission line and matching

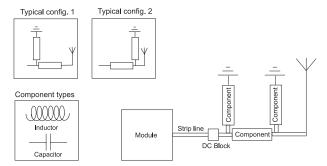


The matching network has to be individually designed using one, two or three components.



t, w = Unique dimensioning according to your PCB \*


C = Inductor and capacitor values according to your specific device\*

#### 10-2 Test board dimensions



The testboard is designed for evaluation purposes for Comata 2.4 GHz SMD antenna. The board has the same size as a typical CF card and is fitted with an U.FL connector.

### 10-3 Test board matching



<sup>\*</sup> Antenova provides this service upon request




The testboard is matched with above specified component.

Note! The component value(s) will vary depending on size of PCB, surrounding components etc.


## 11 Soldering

### 11-1 Recommended soldering conditions



### 11-2 Leadfree soldering

The antenna has been tested and approved for leadfree soldering. The reflow curve and solder paste used is listed below.



Solder paste: KOKI S3X58-M405

## 12 Reliability

### 12-1 Temperature and Humidity

Item	Standard	Low	High	Duration	
Operating temperature	EN/IEC 60068-2-2, Test Bd: Dry heat	-30 degC +90 degC		-	
Temperature cycling	EN/IEC 60068-2-14, Test Na: Change of temperature	-40 degC	+90 degC	500 cycles /10 min	
Storage life Humidity	EN/IEC 60068-2-1, Test Ca: Damp heat	+60 degC / 90% RH		500 h	
Storage life Low temperature	EN/IEC 60068-2-1, Test Ad: Cold	-55 degC	-	500 h	



### 12-2 Mechanical

Item	Standard	Low	High	Duration	
Bending	IEC 60068-2-21, Test Ue1: Bending	Bending 1 mm at a support at end of P			
	lest de i. bending	1mm depth on refer	ence board		
Shear	IEC 60068-2-21, Test Ue3: Shear	Force of 5 N applied antenna.	to the side of the		
Drop test		Dummy weight: 150	g	One drop at each side,	
Diop lest		Height: 170cm		total drops: 6	
		Acceleration spectra	al density:10-1000Hz		
Vibration	EN/IEC 60068-2-6,	Acceleration: 20m/s	5 cycles per axis		
113.44011	Test Fc (sinusoidal)	Number of axes: 3 r perpendicular	nutually	o oyoloo por axio	

#### 12-3 Miscellaneous

Item	Standard	Low	High	Duration
Solderability EN/IEC 60068-2-58, Test Td	Visual inspection of	0.		
	11631 14 1	Estimation of how r pads that are well t	•	

### 12-4 Judgement standard

The judgement of the above tests should be made as follows:

- 1. Visual inspection Normal apperance with no obvious cracking, peeling-off.
- 2. Electrical inspection The DUT satisfies the VSWR specification throughout the 2.4-2.5 GHz band

## 13 Hazardous Material Regulation Conformance

Cadmium and cadmium compound.
Organic brominated compound (PBB, PBDE)
Polychlorinated biphenyl (PCB)
Polychlorinated naphthalene (PCN)
Organic tin compound
Asbestos

Azo compound

Lead and lead compound Mercury and mercury compound Sexivalent chrome compound Chlorinated paraffin (CP) Mirex


Formaldehyde


i dimaidenyde


Tetra-bromo-bisphenol-A-bis (TBBP-A-bis)



## 14 Application example





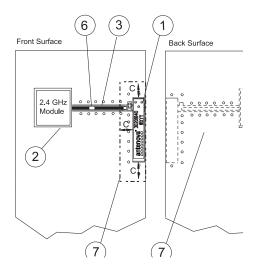

The antenna is of a quarter wave type and is dependent on the groundplane area to complete the antenna function. The antenna performance is also dependent on the size of the groundplane.

#### 1. Placement of the antenna

The antenna shall be placed on a groundplane area, preferably at the edge of the PCB oriented as above.

#### 2. Placement of 2.4 GHz module

To avoid losses in the strip line, the module shall be placed as close to the antenna as possible.

#### 3. Strip line

The strip line must be dimensioned according to your specific PCB. (see fig 1). No crossing strip lines are allowed between the strip line and its ground plane.

#### 4. Via connections

To avoid spurious effects, via connections must be made to analogue ground.

#### 5. Component matching

Component values are depending on antenna placement, PCB dimensions and location of other components.

#### 6. DC Block

Might be needed depending on RF Module configuration.

#### 7. Clearance

Front surface: Minimum clearance to other components, C = 2-5 mm. Back surface: Components allowed.

#### 8. Casing material

No metal casing or plastics using metal flakes shall be used, avoid also metallic based paint or laquer.

Note! Incorrect implementation of the antenna will affect the performance.

Contact Antenova for implementation services




## 15 Packaging

## 15-1 Shelf storage recommendation

Temperature	-10 to +40 degree C
Humidity	Less than 75% RH
Shelf Life	18 Months
Storage place	Away from corrosive gas and direct sunlight

## 15-2 Tape characteristics

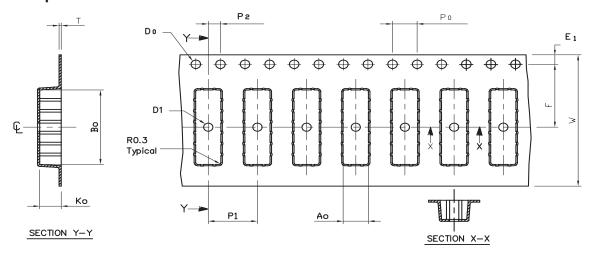


W	F	E,	P <sub>o</sub>	P <sub>1</sub>	P <sub>2</sub>	$\mathbf{A}_{0}$	B <sub>o</sub>	K <sub>0</sub>	Т	D <sub>o</sub>	D <sub>1</sub>
24±0.3	11.50±0.1	1.75±0.1	4.0±0.1	8.0±0.1	2.0±0.1	4.1±0.1	13.6±0.1	3.50±0.1	0.35±0.05	1.55±0.05	1.5 Min

Dimensions in millimeter

Quantity	Leading space	Trailing space
2000 Pcs / reel	50 blank antenna holders	37 blank antenna holders

### 15-3 Reel dimension




Material: Conductive Polystyrene

Width [mm] W: 32

Reel dia [mm] D: 330(13")
Hub dia [mm] H: 100(4")
Shaft dia [mm] C: 13



#### 15-4 Box dimension



Material: Cardboard Width [mm] W: 345 Breadth [mm] B: 345 Thickness [mm] H: 45

### 15-5 Bag properties

Antistatic Aluminium Moisture Barrier Bag

Thickness [mil] T: 3.2

### 15-6 Reel label information

antenova®

Antenova Article number : XXXXAXXXX-XX
Description : Product name, F
Reel Quantity : XXXX Pcs. Product name, Frequenzy Hz XXXX Pcs. Customer PO number YYMMDD

Order No: Date:



#### www.antenova.com

### **Corporate Headquarters**

#### Antenova Ltd.

Far Field House Albert Road Stow-cum-Quy Cambridge CB9 5AR

Tel: +44 (0) 1223 810600 Fax: +44 (0) 1223 810650 Email: info@antenova.com

### **Asia Headquarters**

#### Antenova Asia Ltd.

3F, No 10, Alley 6, Lane 45 Poa Shing Road Hsin Tien City Taipe County ROC 23145

Tel: +886 (0) 2 2917 6536 Fax: +886 (0) 2 2910 6546 Email: info@antenova.com

#### **Sales Offices**

#### **Europe**

Charlotta Olander

UK/EU Sales Manager

Tel: +46 702 913731

#### **America**

**David Nuti** 

NA Sales Manager

Tel: +1 214 668 0357

Email: Lotta.Olander@antenova.com Email: David.Nuti@antenova.com

#### Asia

**CL Lim** 

**VP Sales Asia** 

Tel: +886 (0) 931 201 318 Email: CL.Lim@antenova.com



Certificate No: 4598/04